



### 1. Mechanical Dimensions:

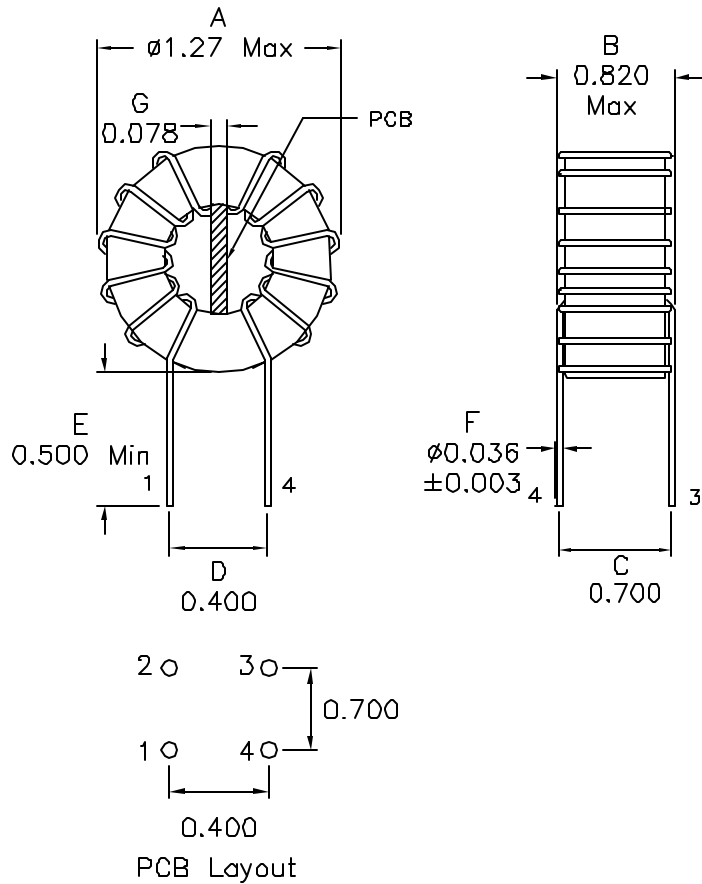

### 2. Schematic:



### 3. Electrical Specifications:

- OCL: 15mH Min @1KHz 1.0V Each Wdg (0°C to +85°C)
- 5.0mH Min @1KHz 1.0V Each Wdg (-40°C to 0°C)
- Rated Current: 3A
- DCR: 0.065 Ohms Max, Each Wdg
- Q: Pins 1-2 5 Min @1KHz 1V, Each Wdg
- Isolation: 1500Vrms Wdg to Wdg
- Rated Voltage: 265VAC


**Notes:**

1. Solderability: Leads shall meet MIL-STD-202C, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. All listed parameters are to be within tolerance from -55°C to +105°C unless otherwise
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/2

**PROPRIETARY** Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

<b>XFMRs Inc</b> <a href="http://www.XFMRs.com">www.XFMRs.com</a>	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0153-VOCMC	REV. A
SHEET 1 OF 2	APP.	YK Liao	Sep-09-09
		Joe Huff	Sep-09-09

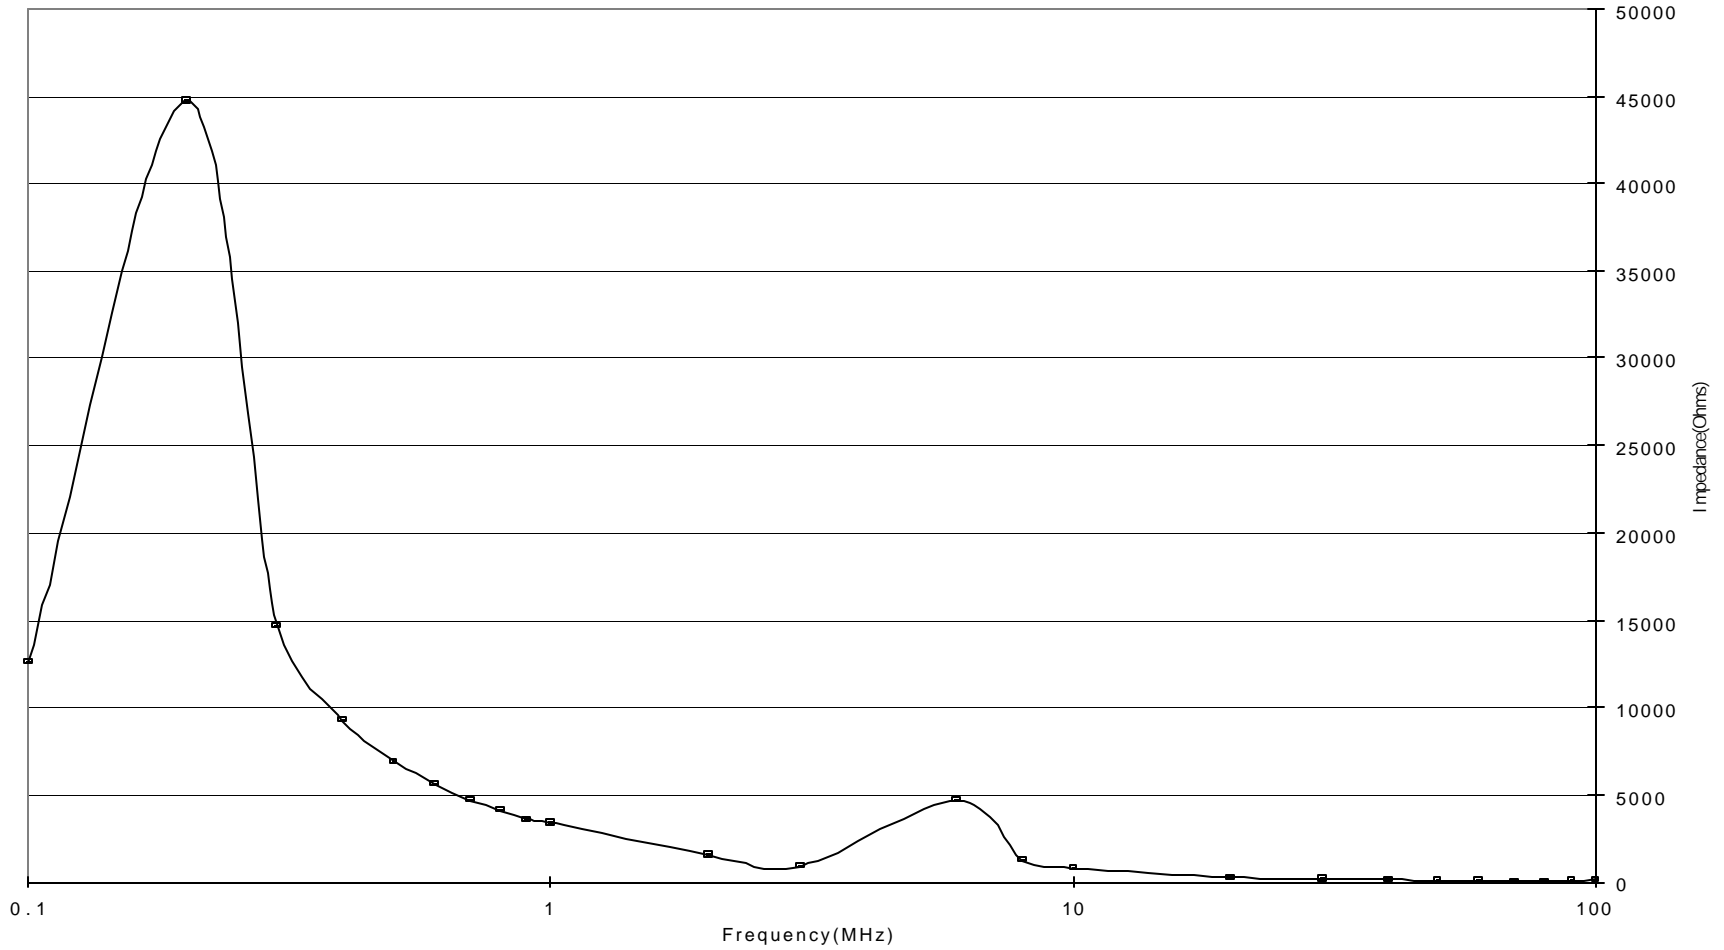

DOC REV: A/2

<b>XFMRs Inc</b> <a href="http://www.XFMRS.com">www.XFMRS.com</a>	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XF0153-VOCMC	REV. A
.xxx ±0.010	DWN.	Xianyí	Sep-09-09
Dimensions in INCH	CHK.	YK Liao	Sep-09-09
SHEET 2 OF 2	APP.	Joe Huff	Sep-09-09

**PROPRIETARY** Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.