



1. Mechanical Dimensions:

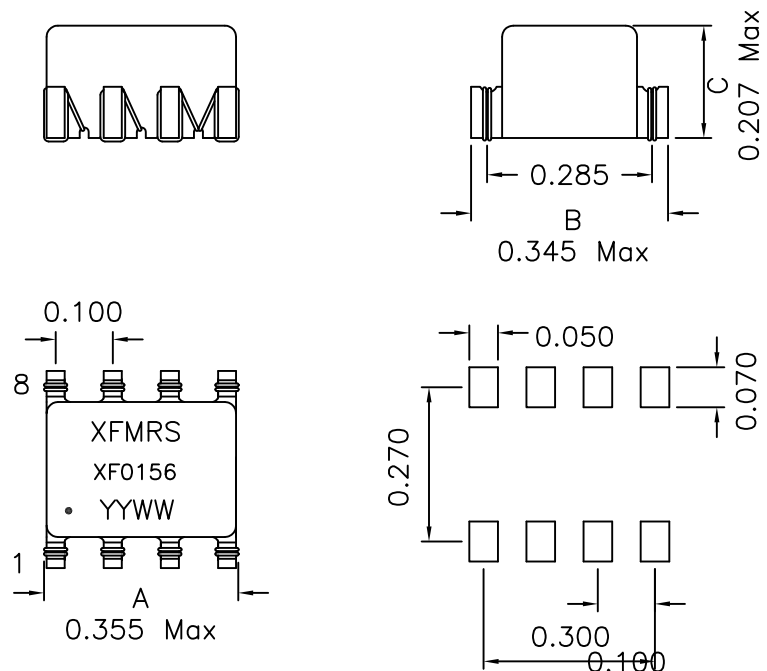

SUGGESTED PAD LAYOUT

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 15uH±20% @10KHz 0.1V Each winding
 DCR: 0.25 Ohms Typ. Each winding
 Turns Ratio: 1:1:1:1
 Rated Current: 350mAac
 HIPOT: 500 Vrms Wire to Wire

PRELIMINARY

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC. REV A/-

XFMR5 Inc.	Title: Common Mode Choke			
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH		P/N: XF0156-CMC10	REV. A
	DWN.	罗振江	Mar-18-15	
	CHK.	廖玉坤	Mar-18-15	
SHEET 1 OF 2	APP.	DDC	Mar-18-15	