

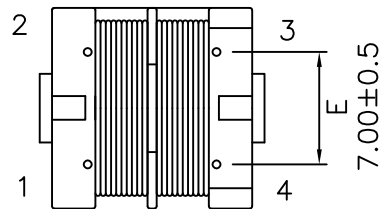


1. Dimensions:

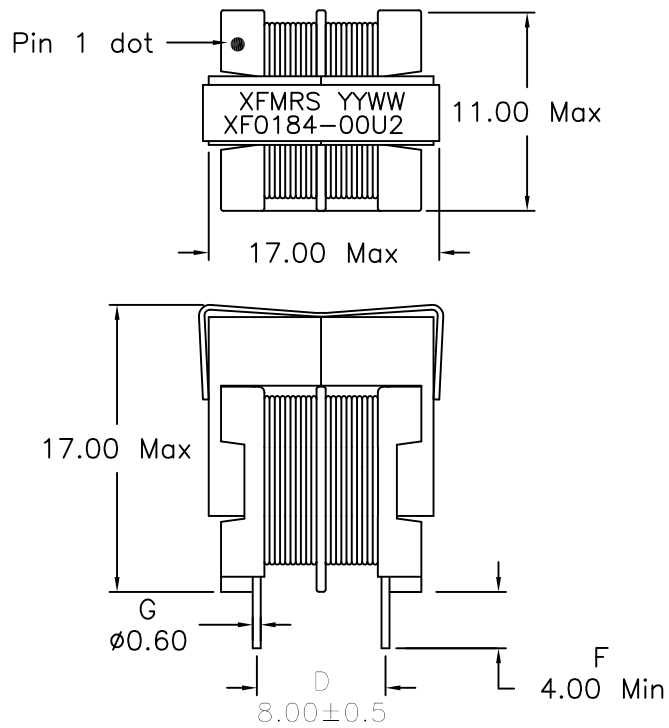

(BOTTOM VIEW)

2. Schematic:

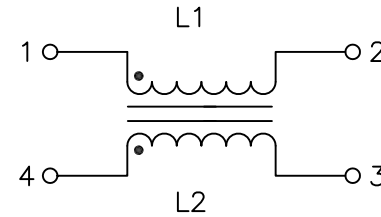

3. Electrical Specifications:

Inductance: 1.8mH ±30% @100KHz 0.1V Each Wdg.

DCR: 0.310 Ohms Max Each Wdg.

Rated Current: 1.0Aac

Rated Voltage: 250Vac

Hipot: 3750Vrms Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs Inc www.XFMRs.com		Title: AC LINE FILTER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0184-00U2	REV. A	
	DWN.	廖玉坤	Aug-20-12
SHEET 1 OF 1	CHK.	李清儿	Aug-20-12
	APP.	BW	Aug-20-12

DOC. REV. A/1