


1. Mechanical Dimensions:

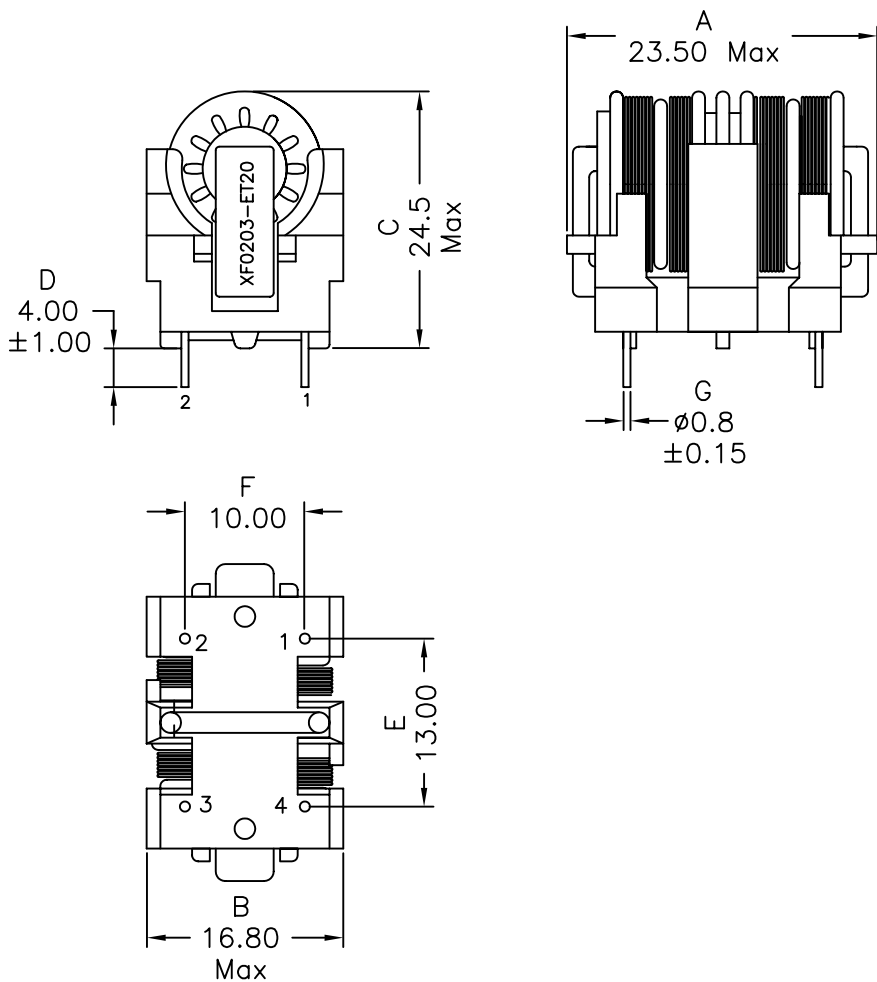


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

2. Schematic:

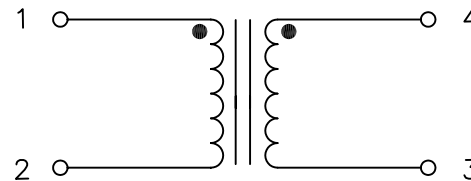

3. Electrical Specifications:

OCL: 20mH Min @10KHz 0.1V, Each Wdg

DCR: tbd Ohms Max, Each Wdg

IDC: 0.3Arms Max

Rated Voltage: 250Vac/dc

Isolation Voltage: 1500Vac Wdg to Wdg

XFMRs Inc www.XFMRS.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0203-ET20	REV. A
TOLERANCES: .xx ±0.30	DWN.	Juan Mao	Aug-02-10
Dimensions in mm	CHK.	YK Liao	Aug-02-10
SHEET 1 OF 1	APP.	BW	Aug-02-10

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.