



1. Mechanical Dimensions:

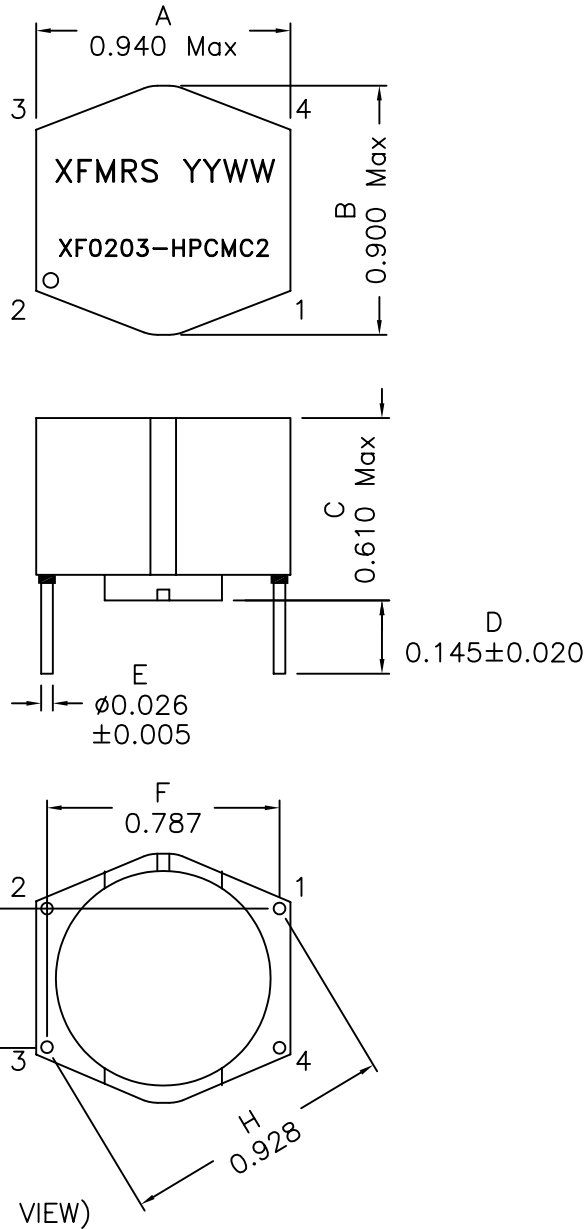

2. Schematic:

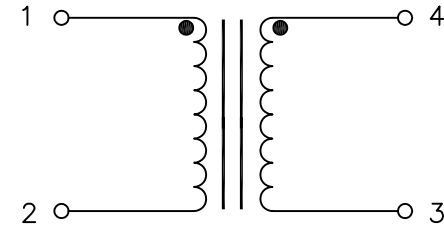

3. Electrical Specifications: @25°C

OCL: 20mH±30% @10KHz 0.05V, Each Wdg

Q: Pins 1-2 25 Min @10KHz 0.05V

DCR: 0.700 Ohms Max, Each Wdg

Rated Current: 1.0A

Isolation Voltage: 1500Vac, Wdg. to Wdg., 2 Sec

Notes:


1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMR5 Inc www.XFMR5.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020 Dimensions in Inch	P/N: XF0203-HPCMC2	REV. A
SHT 1 OF 2	DWN. CHK. APP.	Feng YK Liao BW	Jul-11-12 Jul-11-12 Jul-11-12

DOC. REV: A/3

PROPRIETARY

Document is the property of XFMR5 Group & is not allowed to be duplicated without authorization.

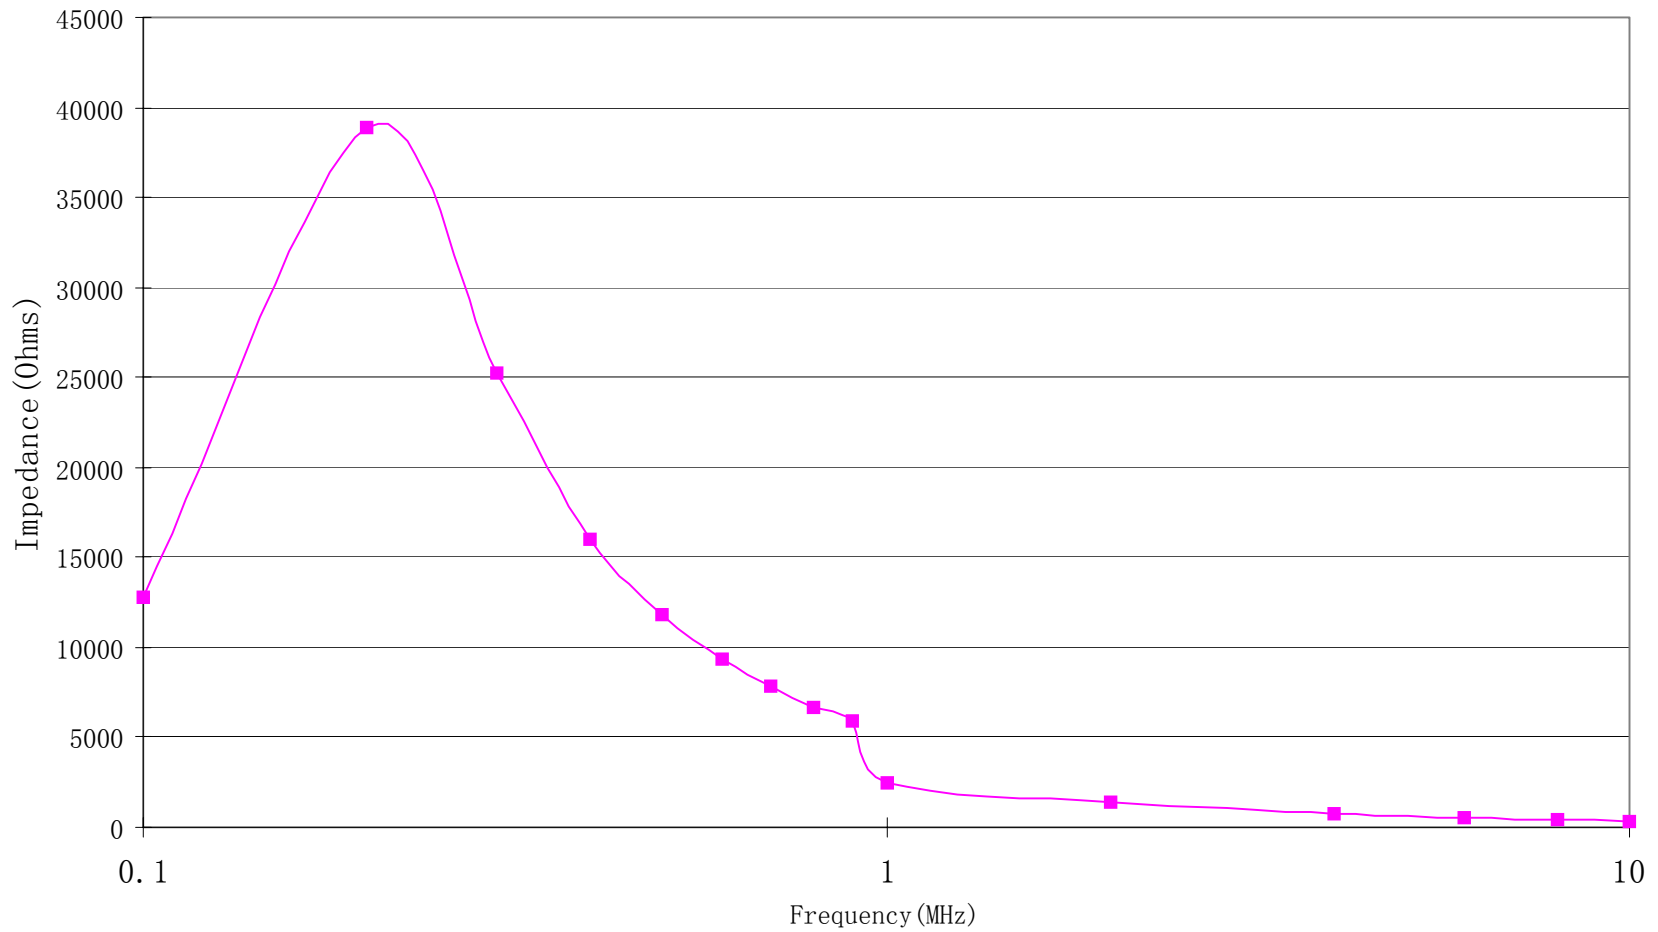

DOC. REV: A/3

XFMRs Inc www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020 Dimensions in Inch	P/N: XF0203-HPCMC2	REV. A
	DWN.	Feng	Jul-11-12
	CHK.	YK Liao	Jul-11-12
SHT 2 OF 2	APP.	BW	Jul-11-12

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.