
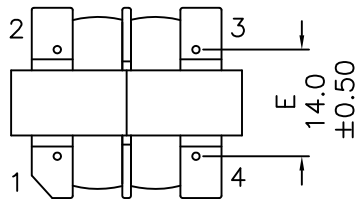


1. Dimensions:

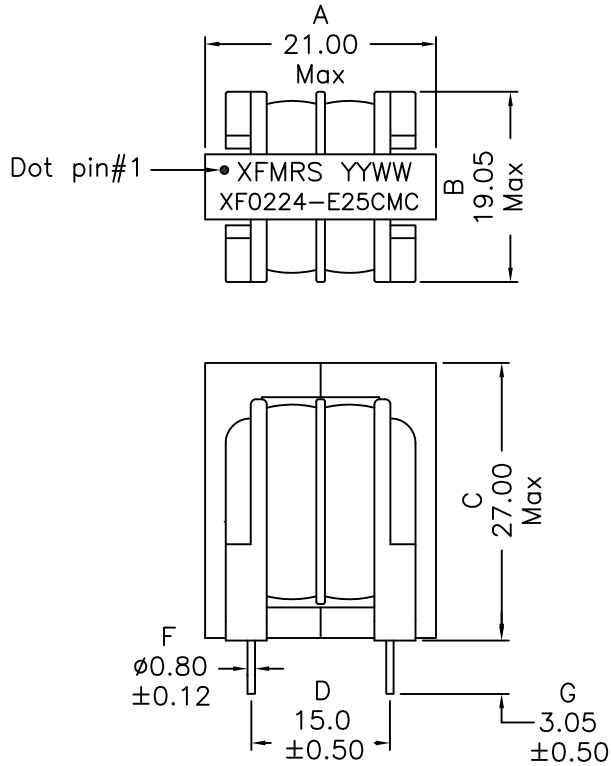


(BOTTOM VIEW)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV. A/1

2. Schematic:

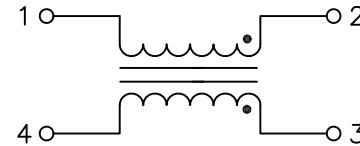


3. Electrical Specifications:

- OCL: 1.43mH Min @1KHz 0.1V (each wdg)
 0.65mH Min @1KHz 0.1V (-40°C to 0°C), each wdg
- Q: 5 Min @1KHz 0.1V (each wdg)
- LL: Pins 2-1 18uH Max @100KHz 0.1V (short 3-4)
- DC Res.: 0.045 Ohms Max. Each Wdg
- HI-POT: 3750Vrms Wdg to Wdg 1mA
- Rated RMS Current: 5.0A
- Turns Ratio: (2-1):(3-4)=1:1±2%
- Rated Voltage: 250Vac 45-400Hz
- SRF: Pins 2-1 250 KHz Min

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: COMMON MODE CHOKE	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0224-E25CMC		REV. A
	DWN.	Xiang	Nov-23-15
	CHK.	YK liao	Nov-23-15
SHEET 1 OF 2	APP.	Joe Huff	Nov-23-15

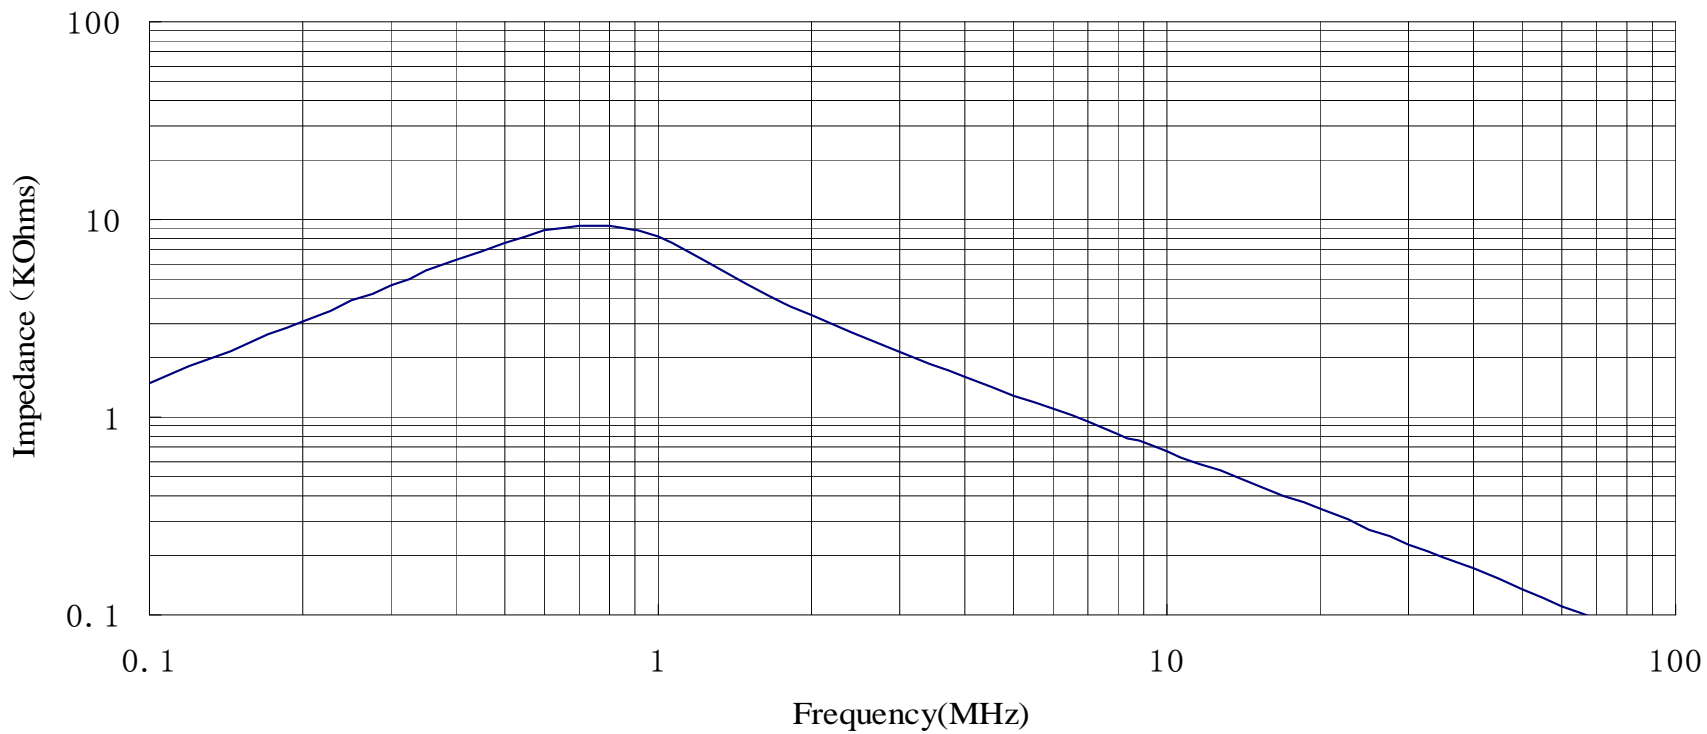

DOC. REV. A/1

XFMRs Inc www.XFMRS.com	Title: COMMON MODE CHOKE		
	P/N: XF0224-E25CMC		REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	DWN.	Xiang	Nov-23-15
	CHK.	YK liao	Nov-23-15
	APP.	Joe Huff	Nov-23-15
SHEET 2 OF 2			

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.