

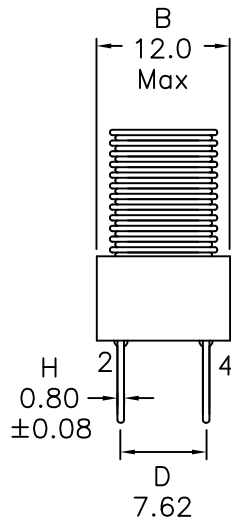


1. Mechanical Dimensions:

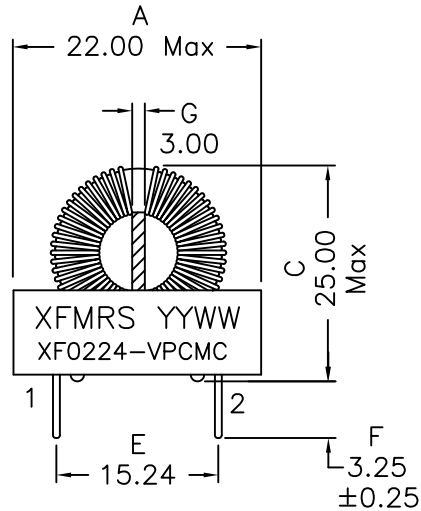

2. Schematic:

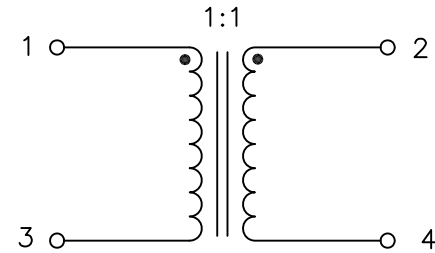

3. Electrical Specifications: @25°C

Inductance: 2.2mH +50-30% @10KHz 1V, Each Wdg

Q: 5 Min @10KHz 1V, Each Wdg

DC Res.: 0.020 Ohms Max, Each Wdg

Rated Current: 5Arms Max


Isolation Voltage: 2500Vac, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/10

XFMRs Inc. www.XFMRS.com		Title: COMMON MODE EMI SUPPRESSION INDUCTOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0224-VPCMC		REV. A
	DWN.	Yuan	Sep-13-13
SHEET 1 OF 2	CHK.	YK Liao	Sep-13-13
	APP.	BSJ	Sep-13-13

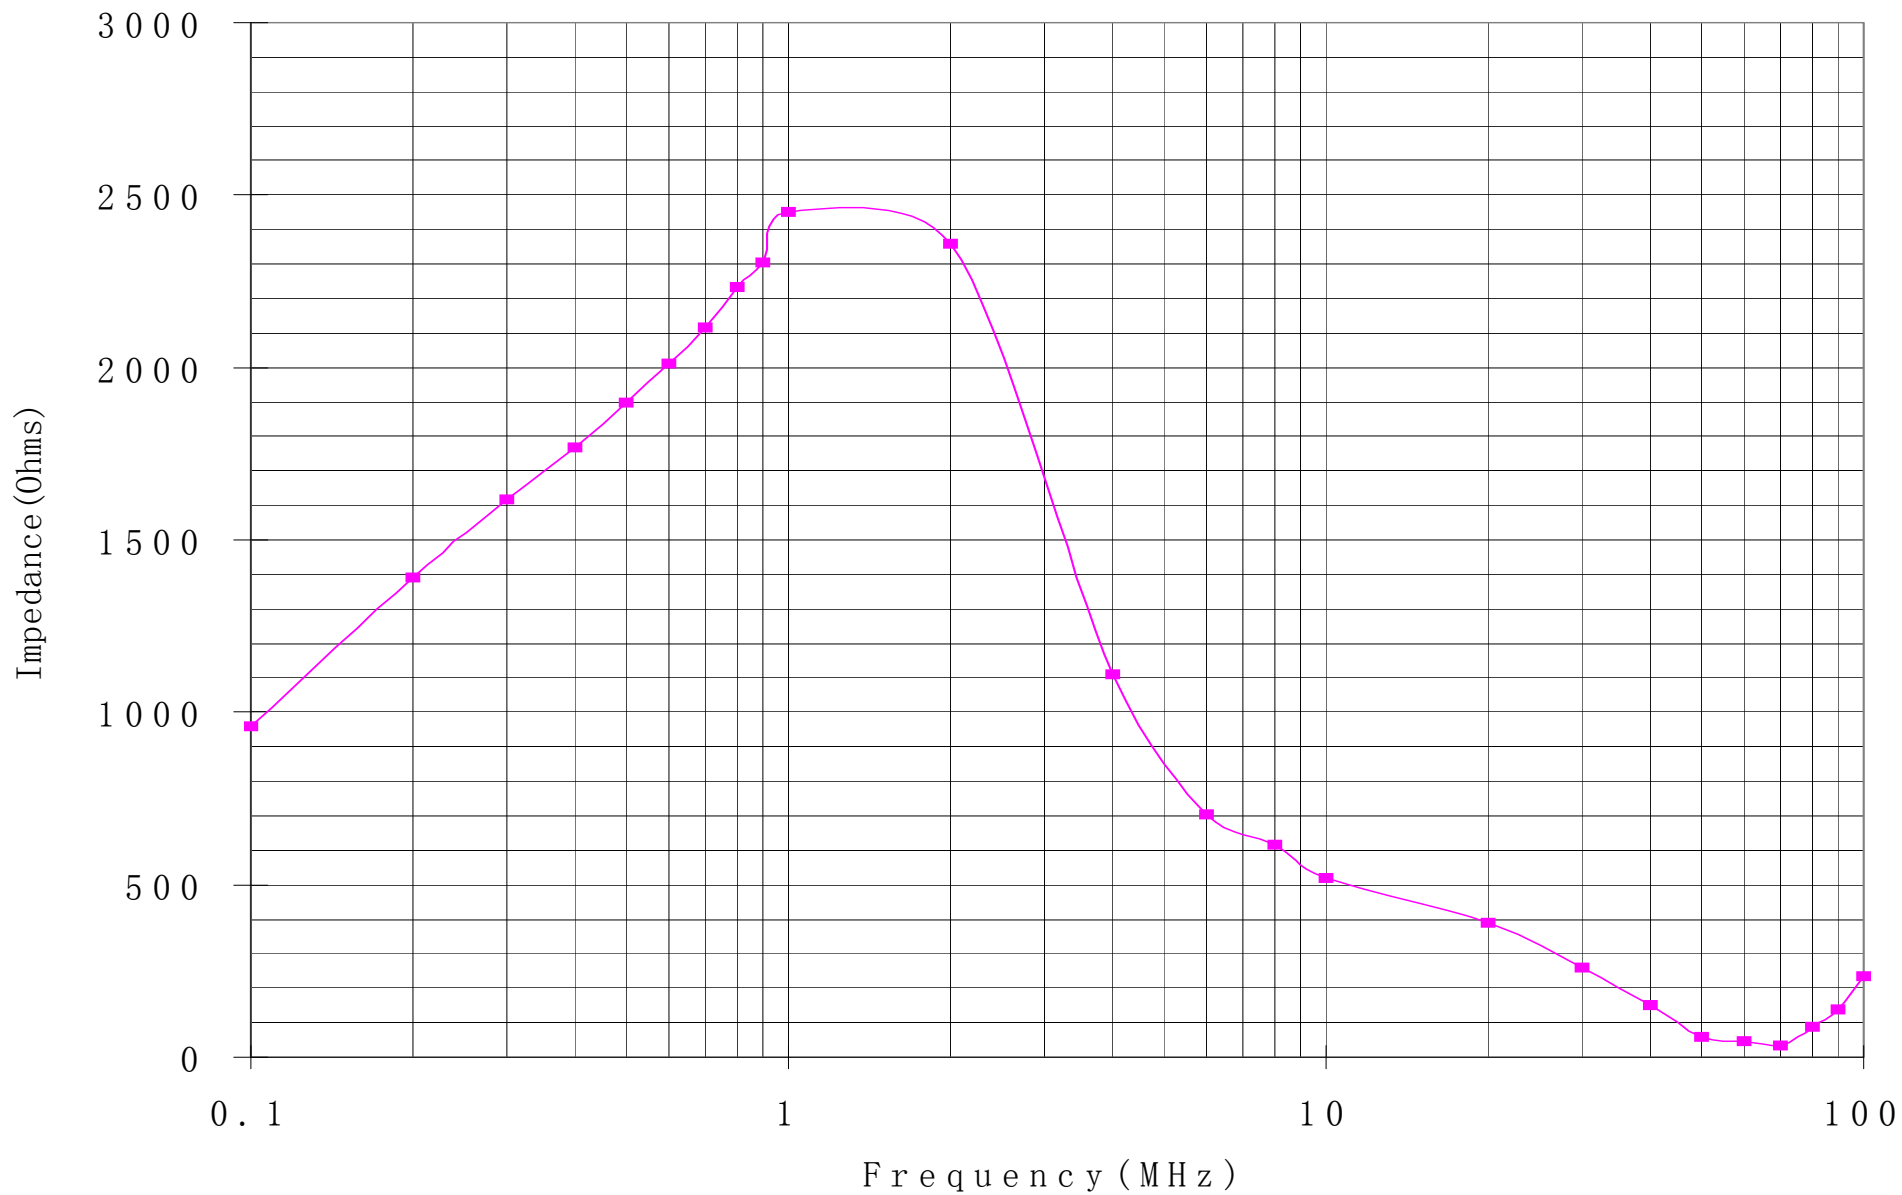

DOC. REV: A/10

XFMRs Inc. www.XFMRs.com	Title: COMMON MODE EMI SUPPRESSION INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XF0224-VPCMC DWN. Yuan CHK. YK Liao APP. BSJ
SHEET 2 OF 2		REV. A Sep-13-13 Sep-13-13 Sep-13-13	

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.