



1. Mechanical Dimensions:

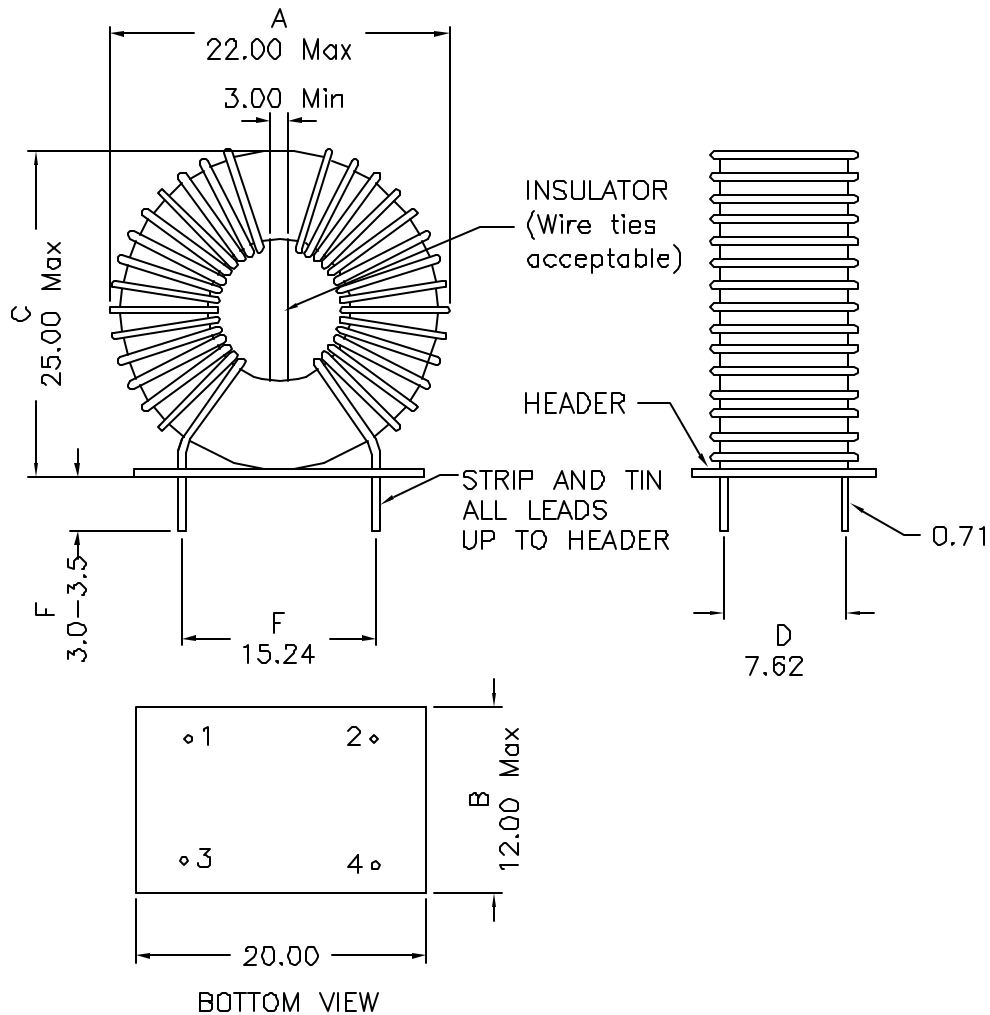

2. Schematic:



3. Electrical Specifications:

OCL: 2.2mH+50% -30% @10KHz 1V Each Wdg.
 OCL: 0.5mH Min @10KHz 1V Each Wdg.-40°C
 LL: 5.0uH Min @ 10KHz 1V Short Opp. Wdg.
 DCR: 20mOhms Max Each Wdg.
 Q: 3 Min @10KHz 1V
 I rated: 5Arms
 HIPOT: 3000Vdc, Wdg to Wdg
 Rated Voltage: 250V

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151558
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/2

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc. www.XFMRs.com	Title: COMMON CODE CHOKE		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N:XF0224A-VMCMC	REV. A	
	DWN.	Xian Yi	Jul-09-08
SHEET 1 OF 1	CHK.	Liao	Jul-09-08
	APP.	Joe Huff	Jul-09-08