

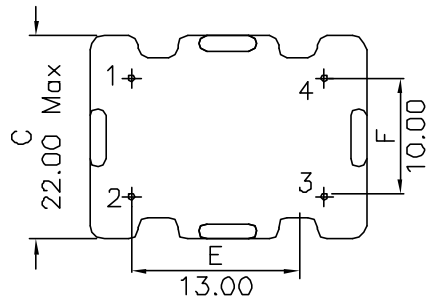
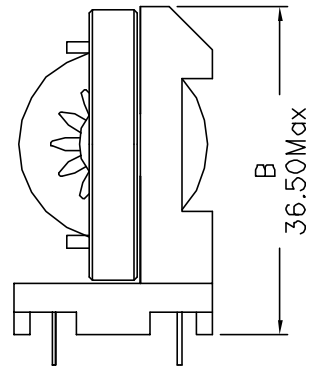



1. Mechanical Dimensions:

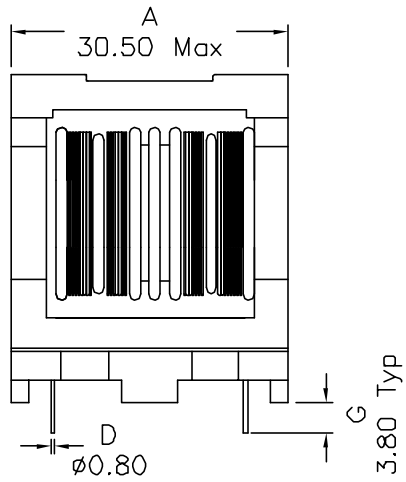

(BOTTOM VIEW)



2. Schematic:

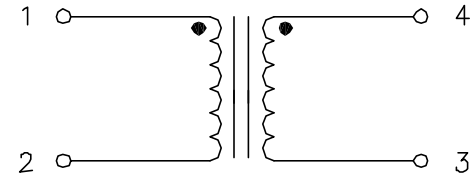

3. Electrical Specifications:

- OCL: 25mH Min @10KHz 0.1V, Each Wdg
- DCR: 0.560 Ohms Max, Each Wdg
- IDC: 1.20Arms Max
- Hipot: 2000Vac, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: $\pm 0.004^*(0.102\text{mm})$
9. Moisture Sensitivity: Level 3
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component

DOC REV: A/1

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com	Title: LINE FILTER		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.30 Dimensions in mm	P/N: XF0253-2801	REV. A	
	DWN.	罗振江	May-27-05
SHEET 1 OF 1	CHK.	廖玉坤	May-27-05
	APP.	BW	May-27-05