
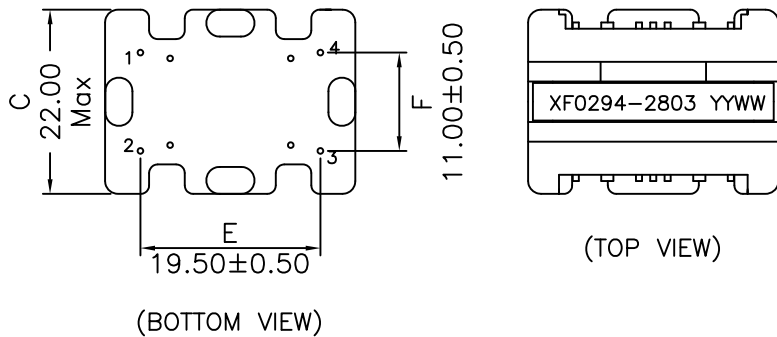



1. Mechanical Dimensions:

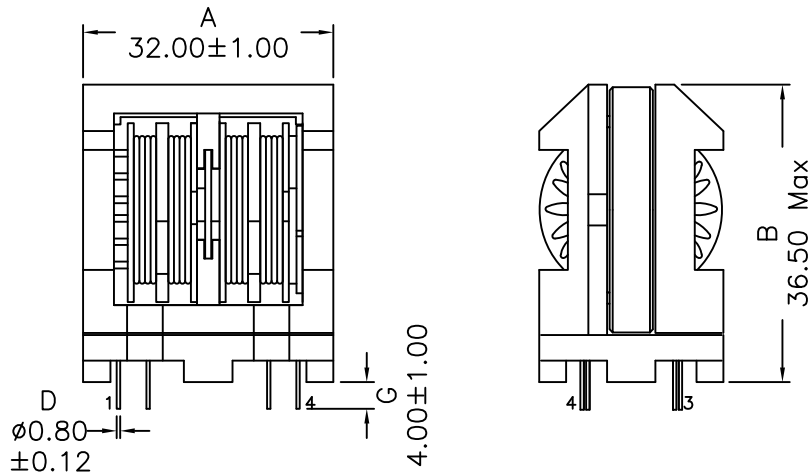

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -20°C to +115°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

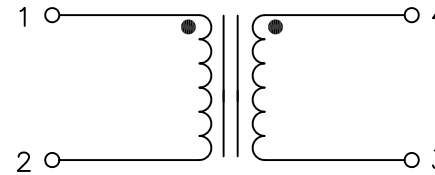

3. Electrical Specifications: @25°C

- OCL: 2.9mH Min @10KHz, 0.1V Each Wdg
- Q: Pins 1-2 tbd Min @10KHz 0.1V
- LL: Pins 1-2 tbd Max @100KHz, 0.1V short P4+3
- DCR: tbd Ohms Max, Each Wdg
- Current Max: 3.0Arms
- Rated Voltage: 250Vac Max
- SRF: Pins 1-2 tbd Min
- Turns Ratio: (1-2):(4-3)=1.00:1.00 ± 2%
- Hipot: 2000Vac, Wdg to Wdg, 1Min
- Rated I: tbd

PRELIMINARY

DOC. REV: A/-

| | | | |
|-----------------------------------|----------------------------|------------------|-----------|
| XFMRs Inc www.XFMRs.com | Title: LINE FILTER | | |
| | UNLESS OTHERWISE SPECIFIED | P/N: XFO294-2803 | REV. A |
| TOLERANCES: .xx ±0.25 | DWN. | Mei Chen | Aug-19-15 |
| Dimensions in MM | CHK. | YK Liao | Aug-19-15 |
| SHEET 1 OF 1 | APP. | BSJ | Aug-19-15 |

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.