




1. Mechanical Dimensions:

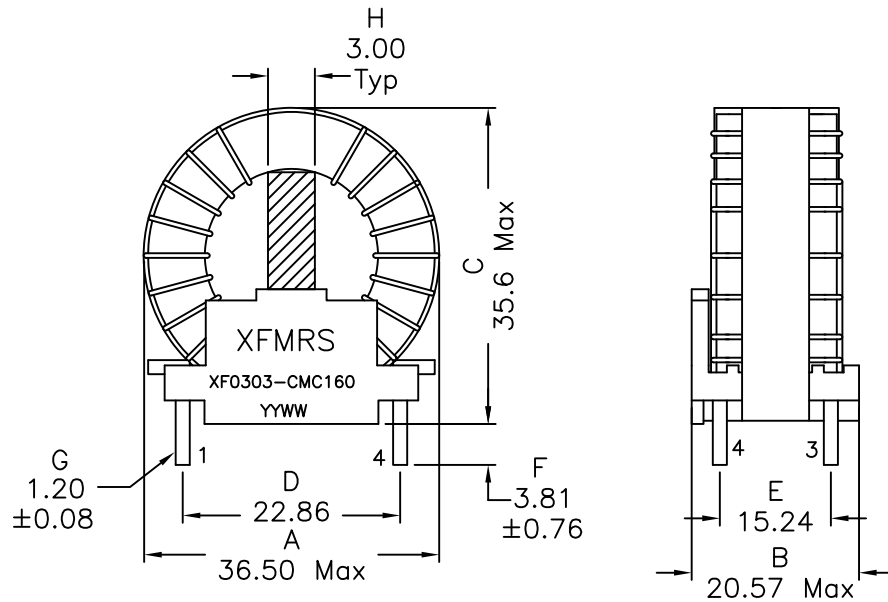

(SUGGESTED FOOTPRINT)

2. Schematic:

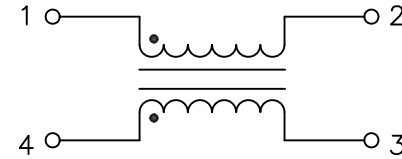

3. Electrical Specifications: @25°C

- OC: 30mH Min @1KHz 0.1V, Each Wdg
- Rated Current: 2.3Arms
- SRF: tbd Typ
- DCR: 0.33 Ohms Max, Each Wdg
- Q: tbd Min @1KHz 0.1V, Each Wdg
- Isolation: 1500Vac, Wdg to Wdg

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

PRELIMINARY

DOC. REV: A/-

XFMRs Inc www.XFMRS.com	Title: Common Mode Choke		
UNLESS OTHERWISE SPECIFIED	P/N: XF0303-CMC160	REV. A	
TOLERANCES: .xx ±0.20	DWN.	Yuan	Jun-05-04
Dimensions in mm	CHK.	YK Liao	Jun-05-04
SHEET 1 OF 1	APP.	DDC	Jun-05-04

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.