



1. Dimensions:

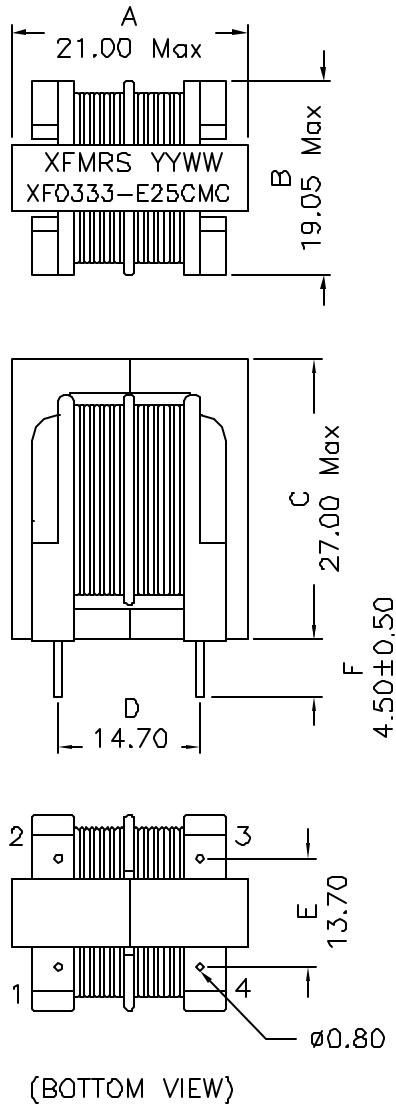

2. Schematic:

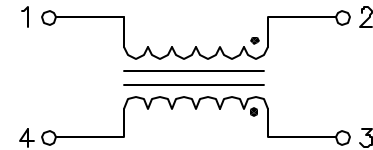

3. Electrical Specifications:

OCL: 33mH Min. @1KHz 0.1V each
 DC Res.: 0.55 Ohms Max. Each Wdg
 HI-POT: 3750Vrms
 Rated RMS Current: 1.00A
 Rated Voltage: 250Vac 45-400Hz

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV. A/4

XFMRS Inc www.XFMRS.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0333-E25CMC	REV. A
SHEET 1 OF 1	DWN.	廖玉坤	Feb-06-07
	CHK.	李清儿	Feb-06-07
	APP.	MS	Feb-06-07