

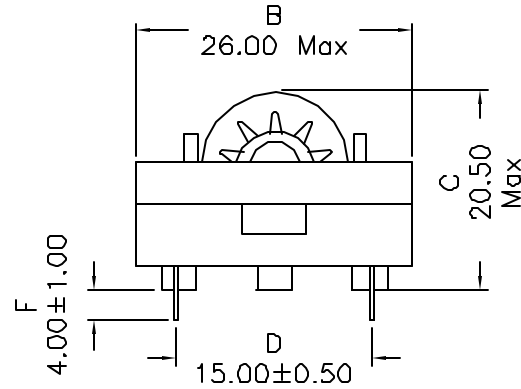



1. Mechanical Dimensions:

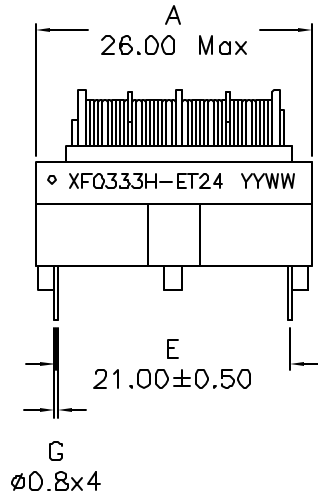

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E15155B
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +105°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004*(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

2. Schematic:

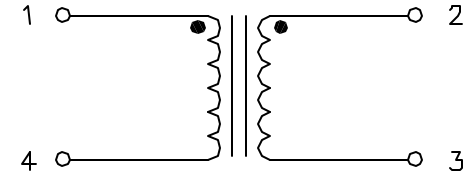

3. Electrical Specifications:

OCL: 33mH Min @1KHz 0.25V, Each Wdg

LL: Pins 1-4 700uH Max @10KHz 0.25V

Short Pins 2-3

DCR: 1.40 Ohms Max, Each Wdg

SRF: 320KHz Typ, Each Wdg

Irated: 800mAac (Based on 45°C Temp Rise)

Hipot: 1800Vac, Wdg to Wdg

DOC REV: A/1

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com		Title: LINE FILTER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	P/N: XF0333H-ET24	REV. A	
	DWN.	罗振江	Jan-09-07
	CHK.	廖玉坤	Jan-09-07
SHEET 1 OF 1	APP.	MS	Jan-09-07