

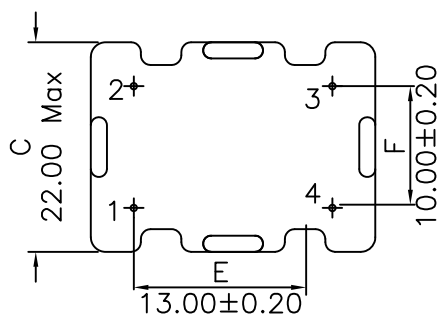


### 1. Mechanical Dimensions:

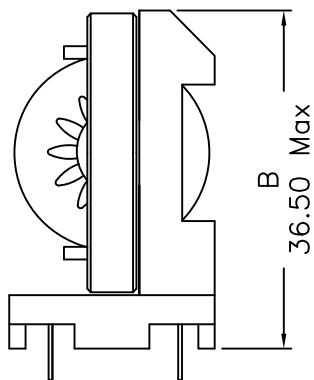


(BOTTOM VIEW)

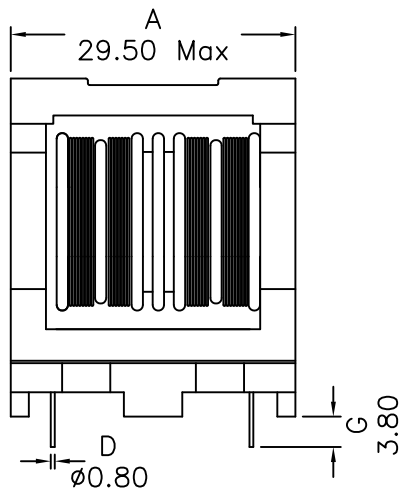

(TOP VIEW)

### 2. Schematic:

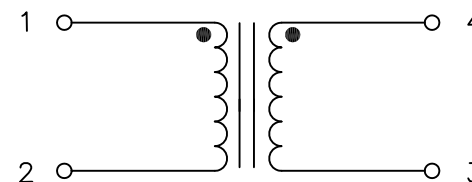

### 3. Electrical Specifications:

OCL: 3.3mH  $-30/+50\%$  @10KHz 0.1V, Each Wdg

DCR: 0.046 Ohms Typical, Each Wdg

IDC: 4.6Arms Max

Hipot: 1500Vac, Wdg to Wdg

#### Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Storage Temperature Range:  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

DOC REV: A/1

<b>XFMRs Inc</b> www.XFMRs.com		Title: LINE FILTER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx $\pm 0.30$ Dimensions in mm		P/N: XF0334-2801	REV. A
		DWN.	罗振江 May-13-13
		CHK.	廖玉坤 May-13-13
SHEET 1 OF 1		APP.	BW May-13-13

**PROPRIETARY**

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.