



1. Mechanical Dimensions:

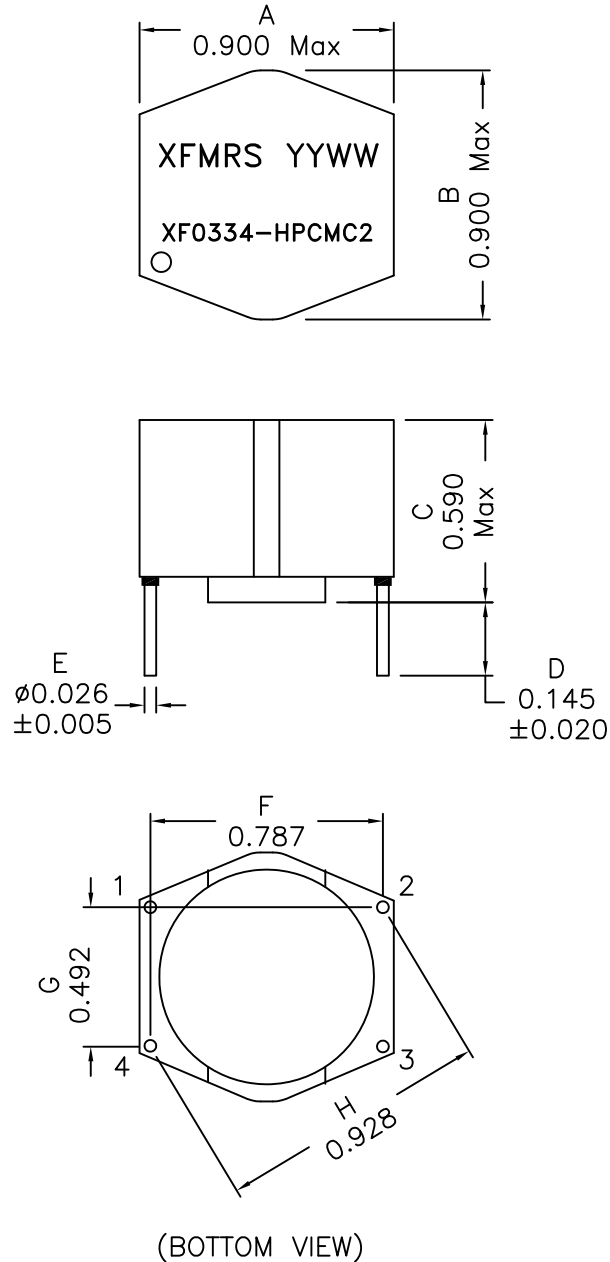

2. Schematic:

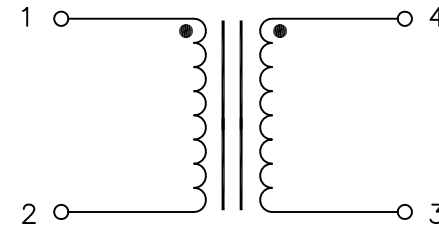

3. Electrical Specifications:@25°C

OCL: 3.3mH+50%/-30% @10KHz 0.05V, Each Wdg
 0°C to +85°C

1.5mH Min @10KHz 0.05V, Each Wdg, -40°C to 0°C

Q: Pins 1-2 5 Min @10KHz 0.05V

DCR: 72 mOhms Max (Each Wdg)

LL: Pins 1-2 23uH Max @100KHz 0.1V, Short Pins 4-3

Rated Current: 2.5Arms Nominal at 40°C


Hipot: 1500Vac, 50Hz, Wdg. to Wdg., 2 Sec

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +125°C unless otherwise noted
6. Storage Temperature Range: -40°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/2

XFMRS Inc. www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED	P/N: XFO334-HPCMC2	REV. A
TOLERANCES: .xxx ±0.020	DWN.	Feng	Feb-18-12
Dimensions in INCH	CHK.	YK Liao	Feb-18-12
SHEET 1 OF 2	APP.	BW	Feb-18-12

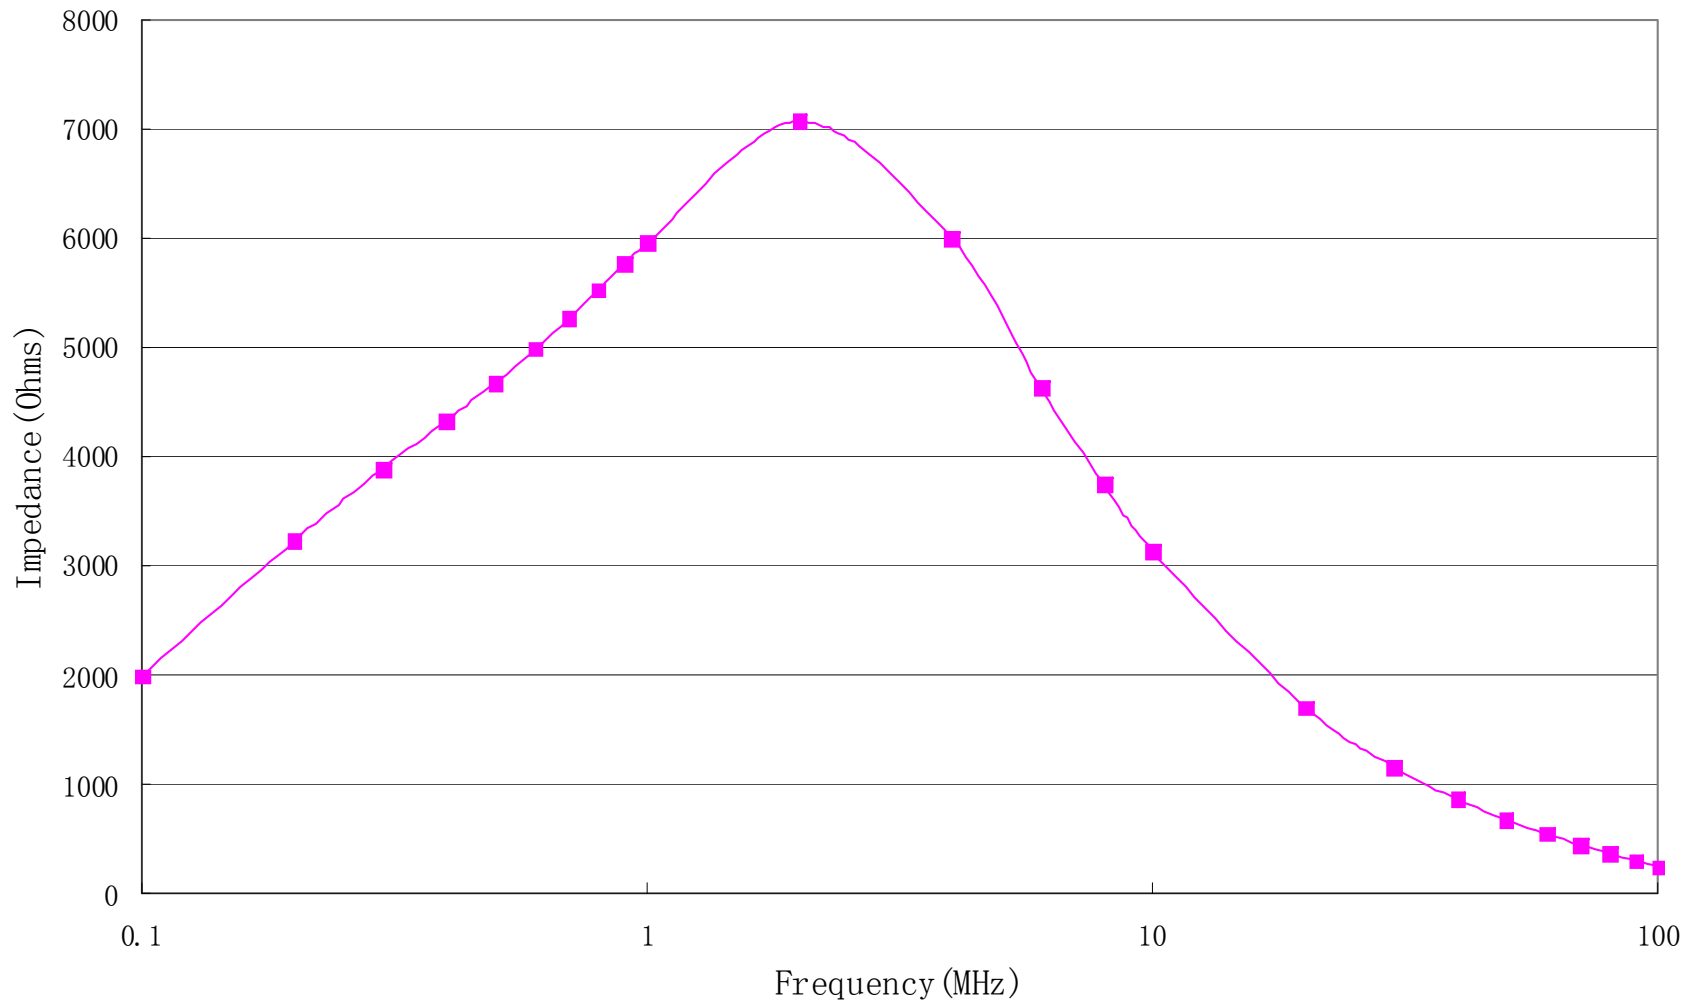

DOC. REV: A/2

XFMRs Inc. www.XFMRS.com	Title: Common Mode Choke			
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020 Dimensions in INCH	P/N: XF0334-HPCMC2	REV. A	
	DWN.	Feng	Feb-18-12	
	CHK.	YK Liao	Feb-18-12	
SHEET 2 OF 2	APP.	BW	Feb-18-12	

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.