



1. Mechanical Dimensions:

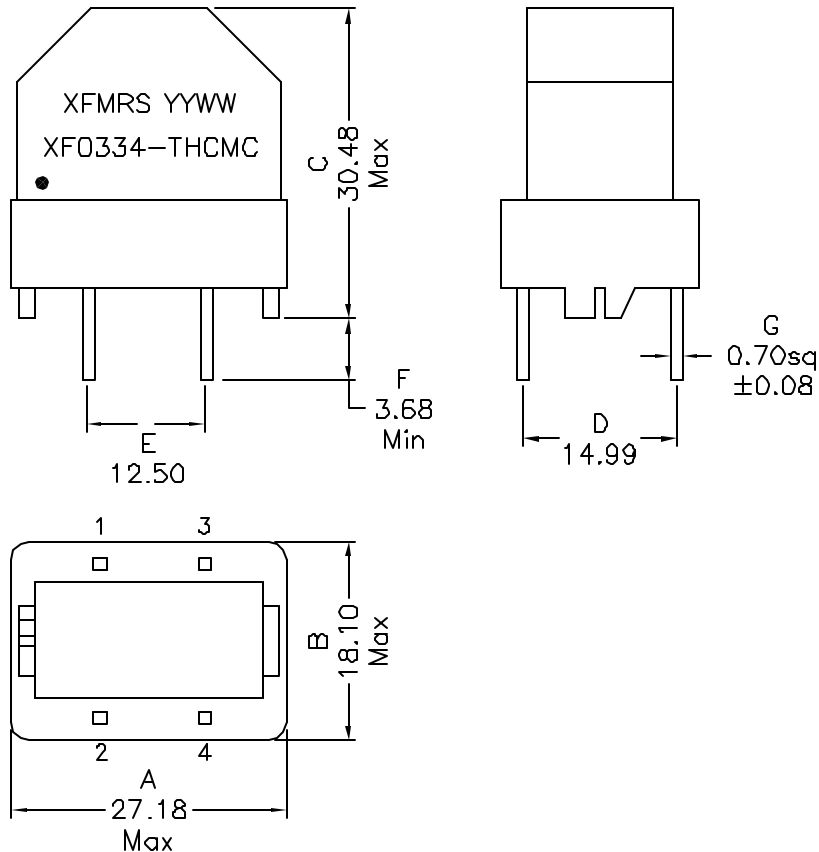

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

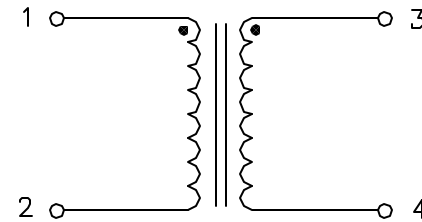

3. Electrical Specifications:

- OCL: 3.30mH±30% @10KHz 0.1V, Each Wdg
- OCL: 1mH Min @10KHz 0.1V, Each Wdg -40°C
- Q: 15 Min @10KHz 0.1V, Each Wdg
- Rated: 4.0Arms
- Isolation: 1500Vac, Wdg to Wdg
- DCR: 0.065 Ohms Typ Each Wdg.

DOC REV: A/2

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0334-THCMC	REV. A
TOLERANCES: .xx ±0.25	DWN.	Juan Mao	Jun-04-08
Dimensions in MM	CHK.	YK Liao	Jun-04-08
SHEET 1 OF 1	APP.	JOe Huff	Jun-04-08