

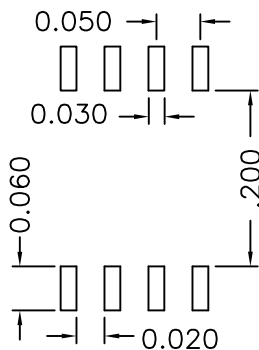

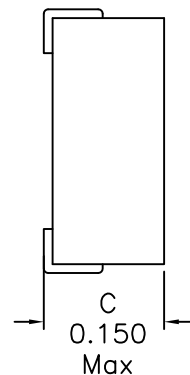


1. Mechanical Dimensions:

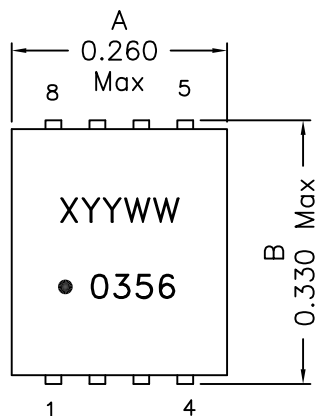

Mounting Pattern



BOTTOM VIEW

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 35uH Min @130KHz 0.1V, Each Wdg

Q : 8 Min @10KHz 50mV, Each Wdg

DCR: 0.075 Ohms Max, Each Wdg

Rated Current: 500mA

Turns Ratio: 1:1

HIPOT: 1500Vac, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC. REV A/10


XFMRs Inc. www.XFMRs.com	Title: Surface Mount Tip Ring Filter	
	P/N: XF0356-2CMC	REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	DWN.	Feng
	CHK.	YK Liao
SHEET 1 OF 2	APP.	GL

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

Feb-29-16
Feb-29-16
Feb-29-16

Typical Response

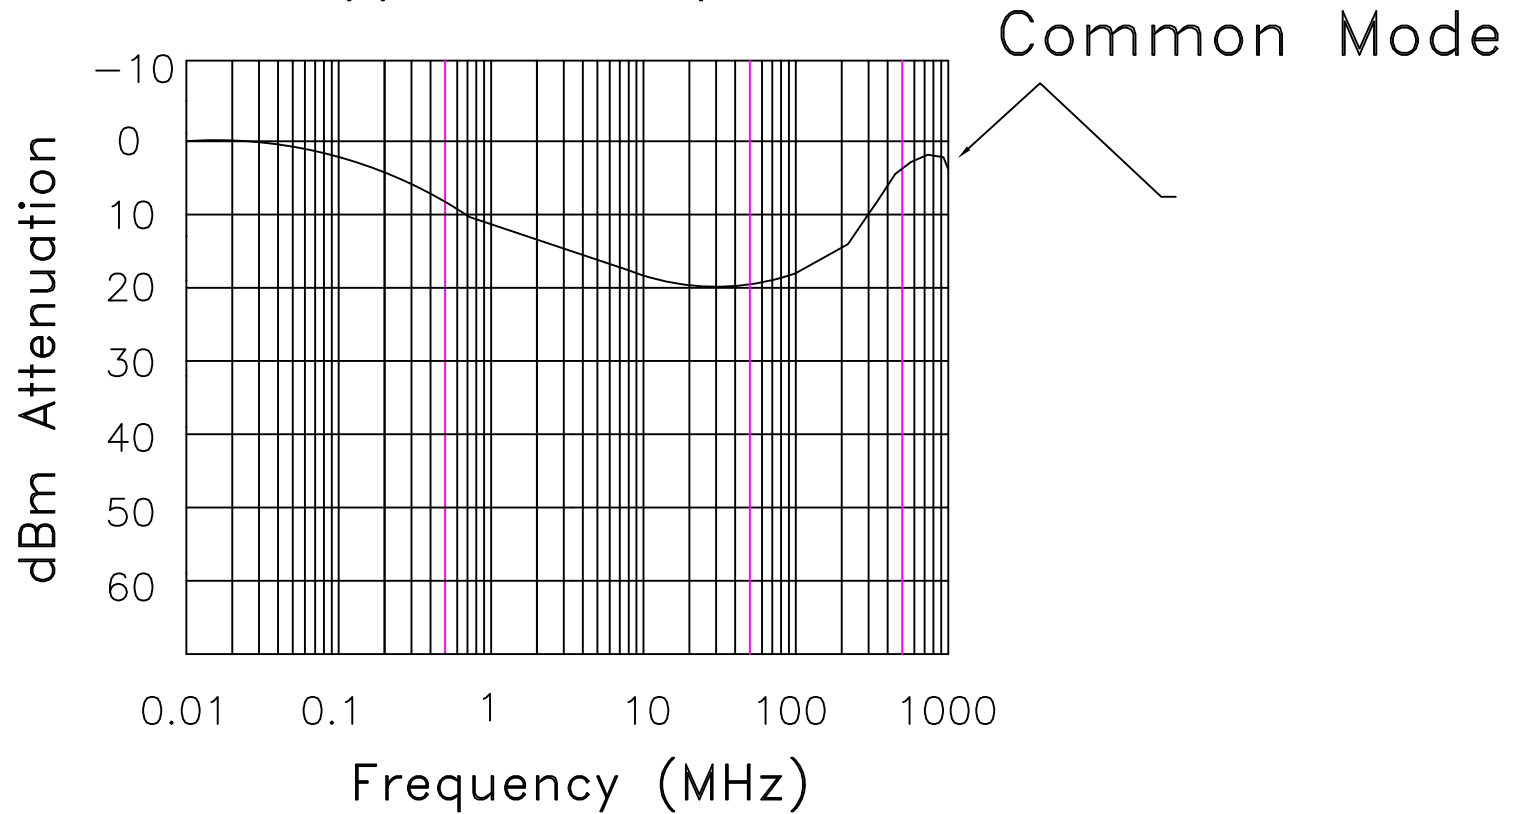

XFMRs Inc. www.XFMRS.com	Title: Surface Mount Tip Ring Filter		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0356-2CMC	REV. A
	DWN.	Feng	Feb-29-16
	CHK.	YK Liao	Feb-29-16
SHEET 2 OF 2	APP.	GL	Feb-29-16

DOC. REV A/10

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.