




1. Mechanical Dimensions:

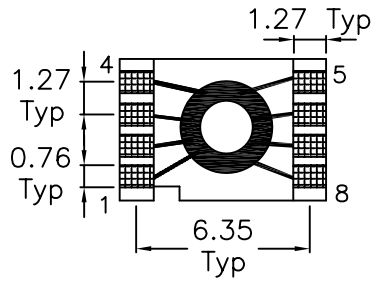


Bottom View



Front View




Side View

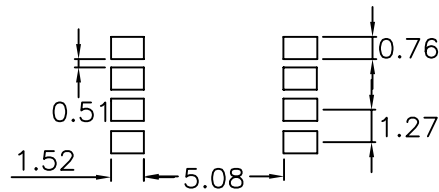

Mounting Pad

2. Schematic:



3. Electrical Specifications:

OCL: 35uH Min @130KHz 0.1V, Each Wdg

DCR: 0.075 Ohms Max, Each Wdg

Rated I: 500mA

Isolation: 1500Vrms, Wdg to Wdg


Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV: A/1

XFMRS Inc	Title: Tip Ring Filter		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.010 Dimensions in Inches	P/N: XF0356C-2CMC	REV A
	DWN.	李清儿	Jul-15-99
	CHK.	孙悦	Jul-15-99
Scale 2.5:1 SHT 1 OF 2	APP.	Joe Huff	Jul-15-99

4. Frequency Response: (Typical)

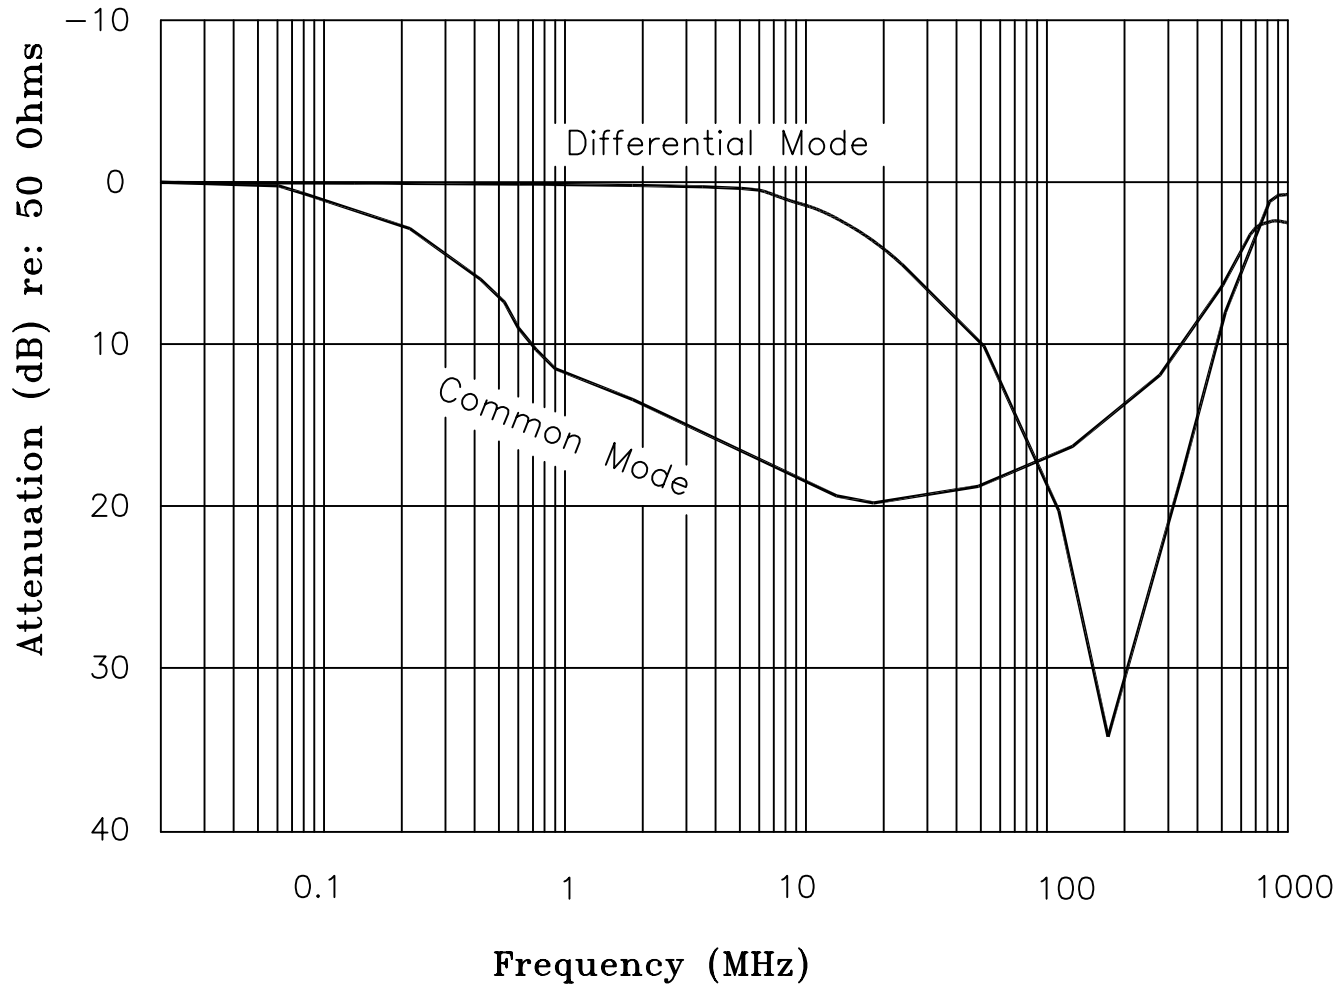

MEASURED ON HP8712B NETWORK ANALYER.

DOC. REV: A/1

XFMRs Inc

Title: **Tip Ring Filter**

UNLESS OTHERWISE SPECIFIED

P/N: XF0356C-2CMC

REV A

TOLERANCES:

DWN.

李清儿

Jul-15-99

.xx ±0.010

CHK.

孙悦

Jul-15-99

Dimensions in Inches

APP.

Joe Huff

Jul-15-99

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

Scale 2.5:1 SHT 2 OF 2