



## 1. Mechanical Dimensions:

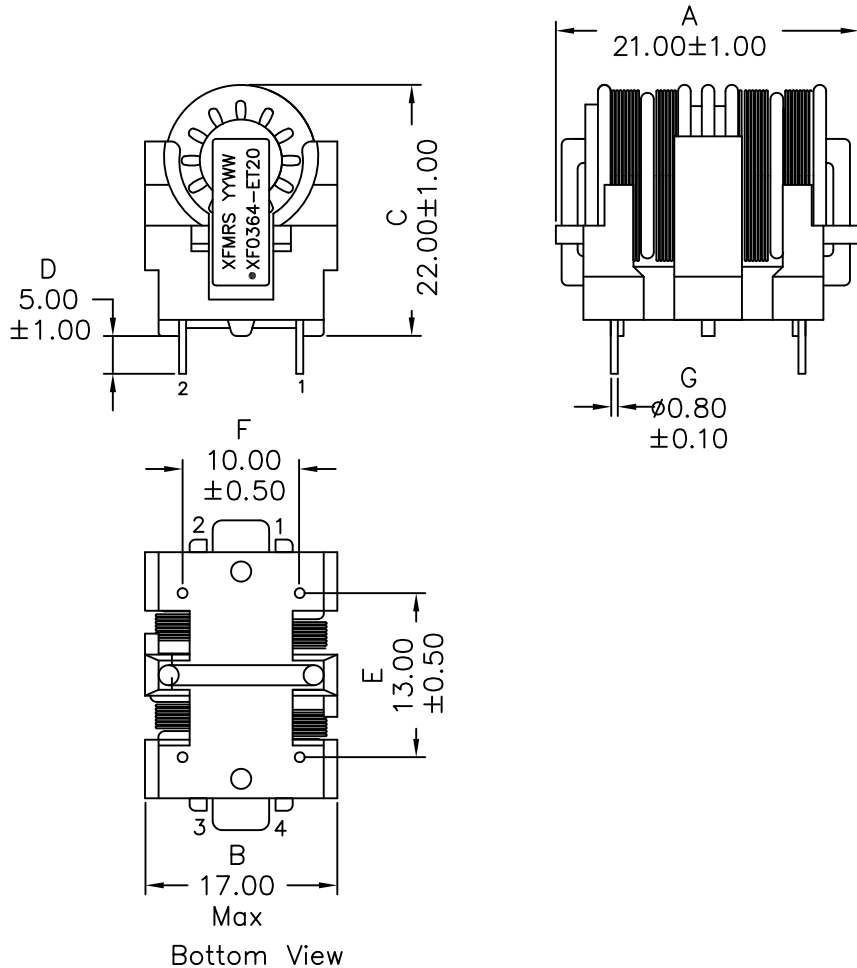

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

## 2. Schematic:

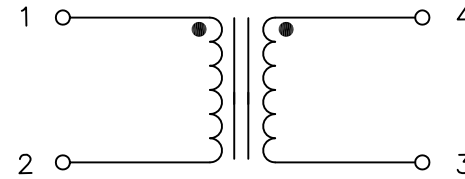

## 3. Electrical Specifications: @25°C

OCL: 3.6mH Min @1KHz 1V, Each Wdg

Q: Pins 1-2 tbd Min @1KHz 1V

LL: Pins 1-2 tbd Max @100KHz 0.1V, Short 4+3

DCR: 0.19 Ohms Max, Each Wdg

Rated Current: 1.7Arms

Turns Ratio: (1-2):(4-3)=1.000:1.000±2%

Hipot: 1500Vac Wdg to Wdg

**PRELIMINARY**

DOC. REV: A/-

<b>XFMRs Inc</b> <a href="http://www.XFMRs.com">www.XFMRs.com</a>	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0364-ET20	REV. A
TOLERANCES:	DWN.	Xiang	Mar-23-16
.xx ±0.25	CHK.	YK Liao	Mar-23-16
Dimensions in mm	APP.	DDC	Mar-23-16
SHEET 1 OF 1			

**PROPRIETARY**

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.