



1. Mechanical Dimensions:

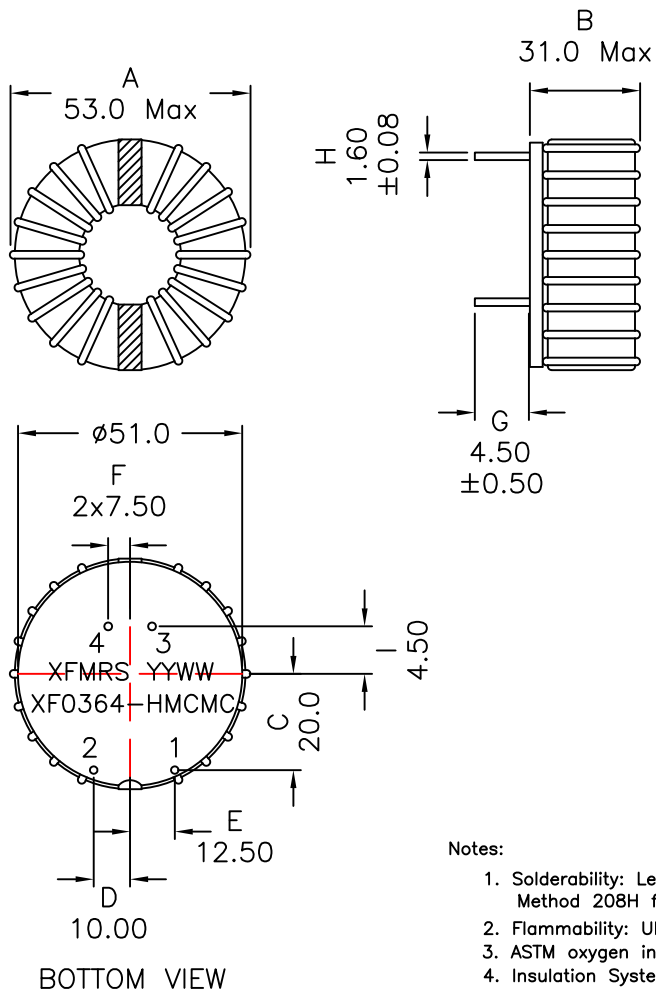

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 150°C. UL file E151556
5. Operating Temperature -40°C to +85°
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

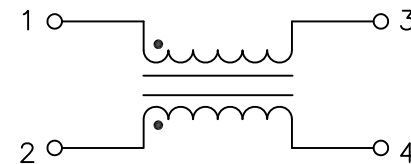

3. Electrical Specifications: @25°C

OCL: 3.6mH+50%/-30% @10KHz, 380mV

LL: Pins 1-3 35uH Max @100KHz, 0.1V (short 2-4)

Q: 3 Min @10KHz, 0.1V

DCR: 13mOhms Max each Wdg

Hipot: 2500Vac

Current Rating: 25Amps


SRF: Pins 1-3 200KHz Min

DOC REV.: A/5

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com		Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED		P/N: XF0364-HMCMC	
TOLERANCES: .xx ±0.25		DWN.	Huo
Dimensions in MM		CHK.	YK Liao
SHEET 1 OF 2		APP.	BSJ
			REV. A
			Aug-15-17
			Aug-15-17
			Aug-15-17

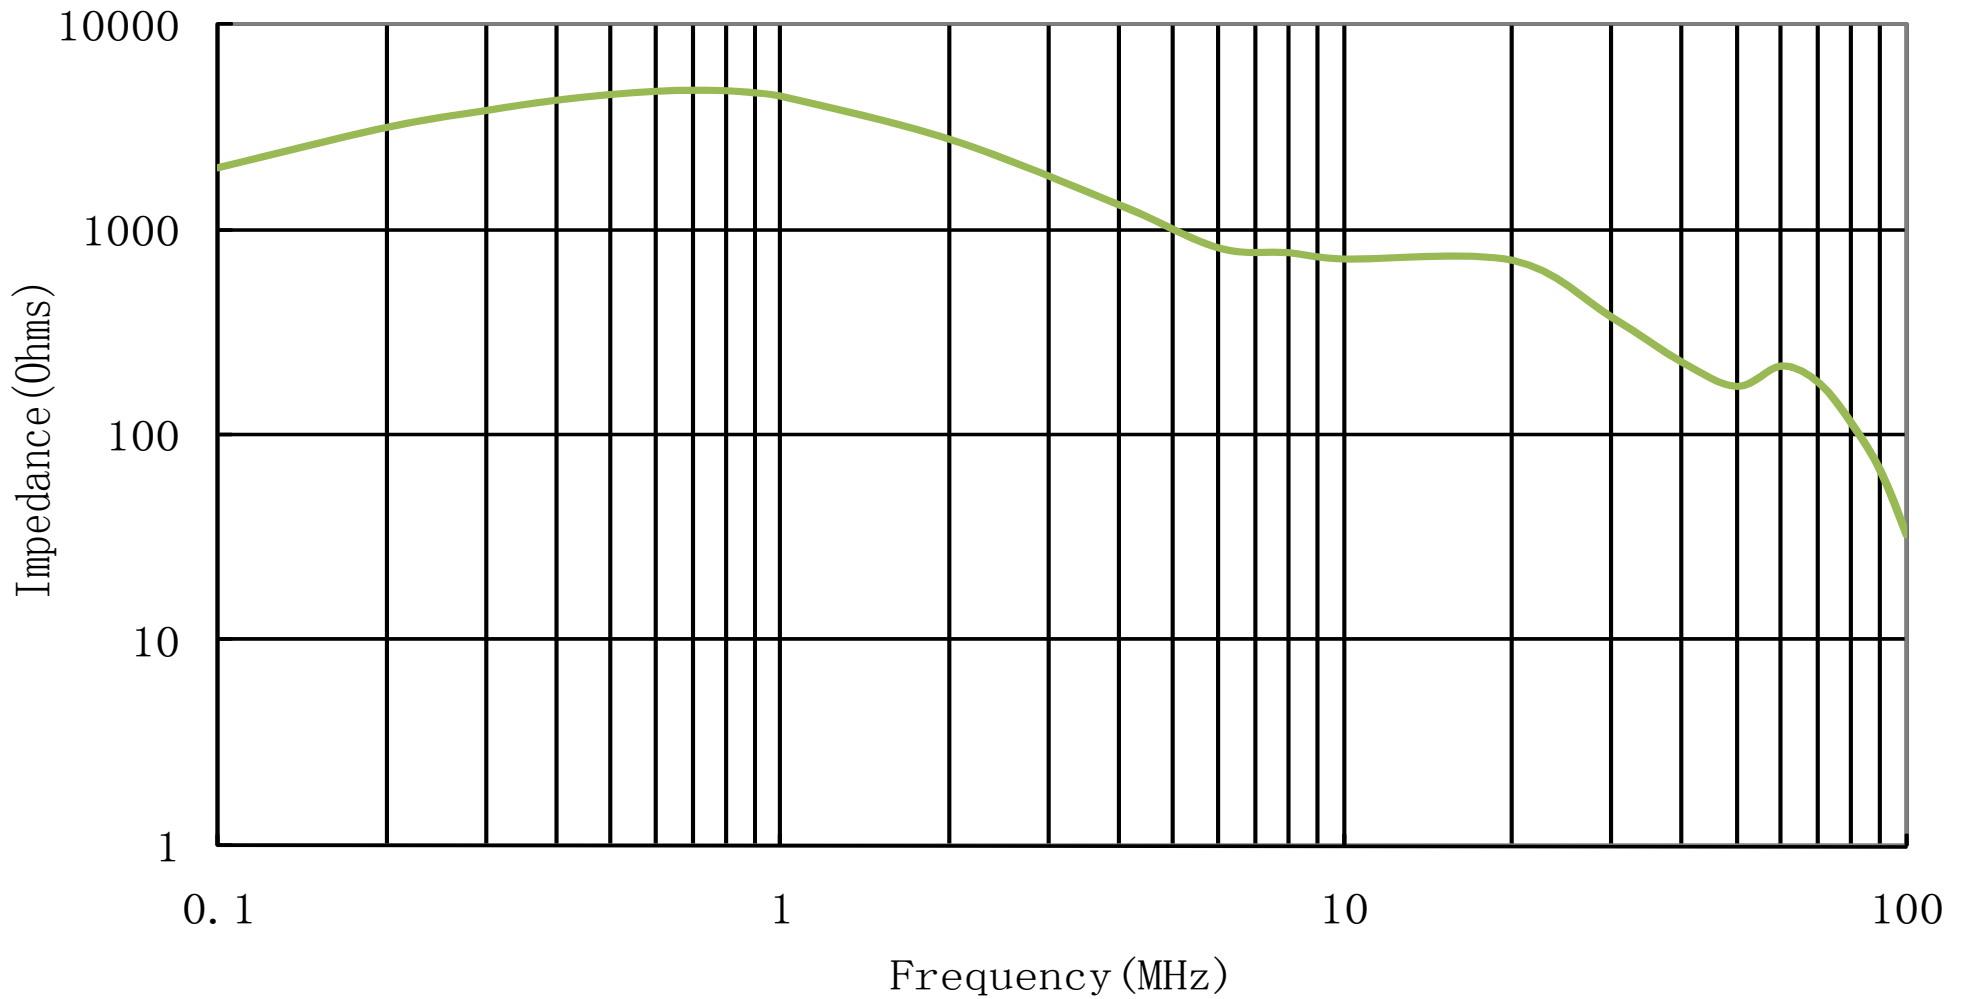

DOC REV.: A/5

XFMRs Inc www.XFMRs.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0364-HMCMC	REV. A
TOLERANCES: .xx ±0.25	DWN.	Huo	Aug-15-17
Dimensions in MM	CHK.	YK Liao	Aug-15-17
SHEET 2 OF 2	APP.	BSJ	Aug-15-17

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.