


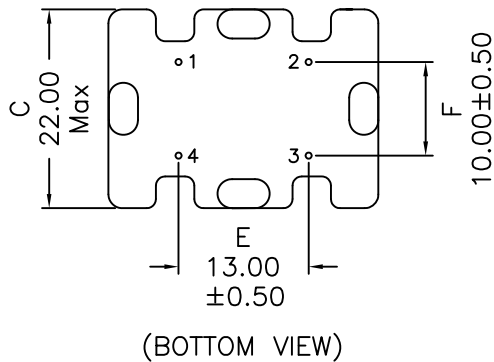


1. Mechanical Dimensions:

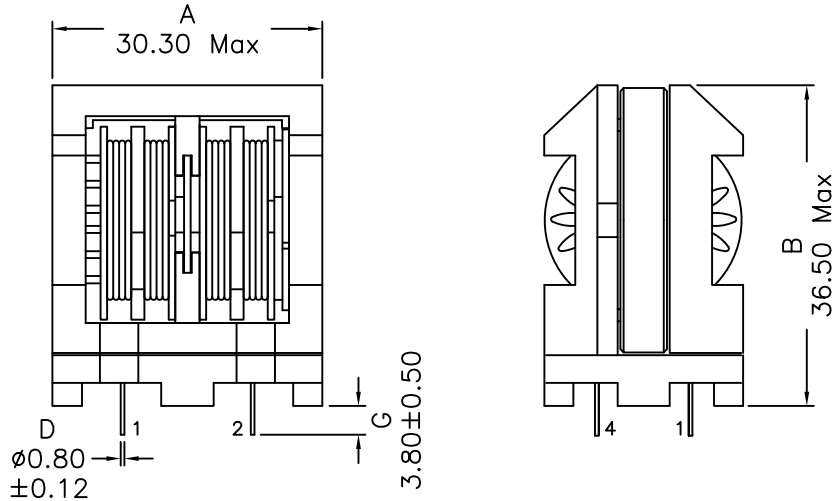

2. Schematic:

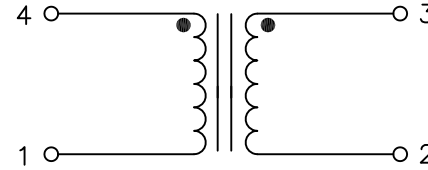

3. Electrical Specifications: @25°C


- OCL: 39mH-30/+50% @10KHz, 0.1V Each Wdg
 6.80-108mH @10KHz, 0.1V Each Wdg -40°C to +120°C
- Q: 5 Min @10KHz 0.1V, Each Wdg
- LL: Pins 4-1 385uH Max @10KHz, 0.1V (short 2-3)
- DCR: 0.600 Ohms Max, Each Wdg
- Rated Current: 1.40Arms Max
- Rated Voltage: 80-300Vac 50/60Hz
- SRF: 100KHz Min, Each Wdg
- Turns Ratio: (4-1):(3-2)=1.000:1.000±2%
- Hipot: 1500Vac, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/2

XFMRs Inc www.XFMRs.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM		P/N: XF0393-2801
SHEET 1 OF 2	DWN.	Yuan	Apr-07-15
	CHK.	YK Liao	Apr-07-15
	APP.	Joe Huff	Apr-07-15

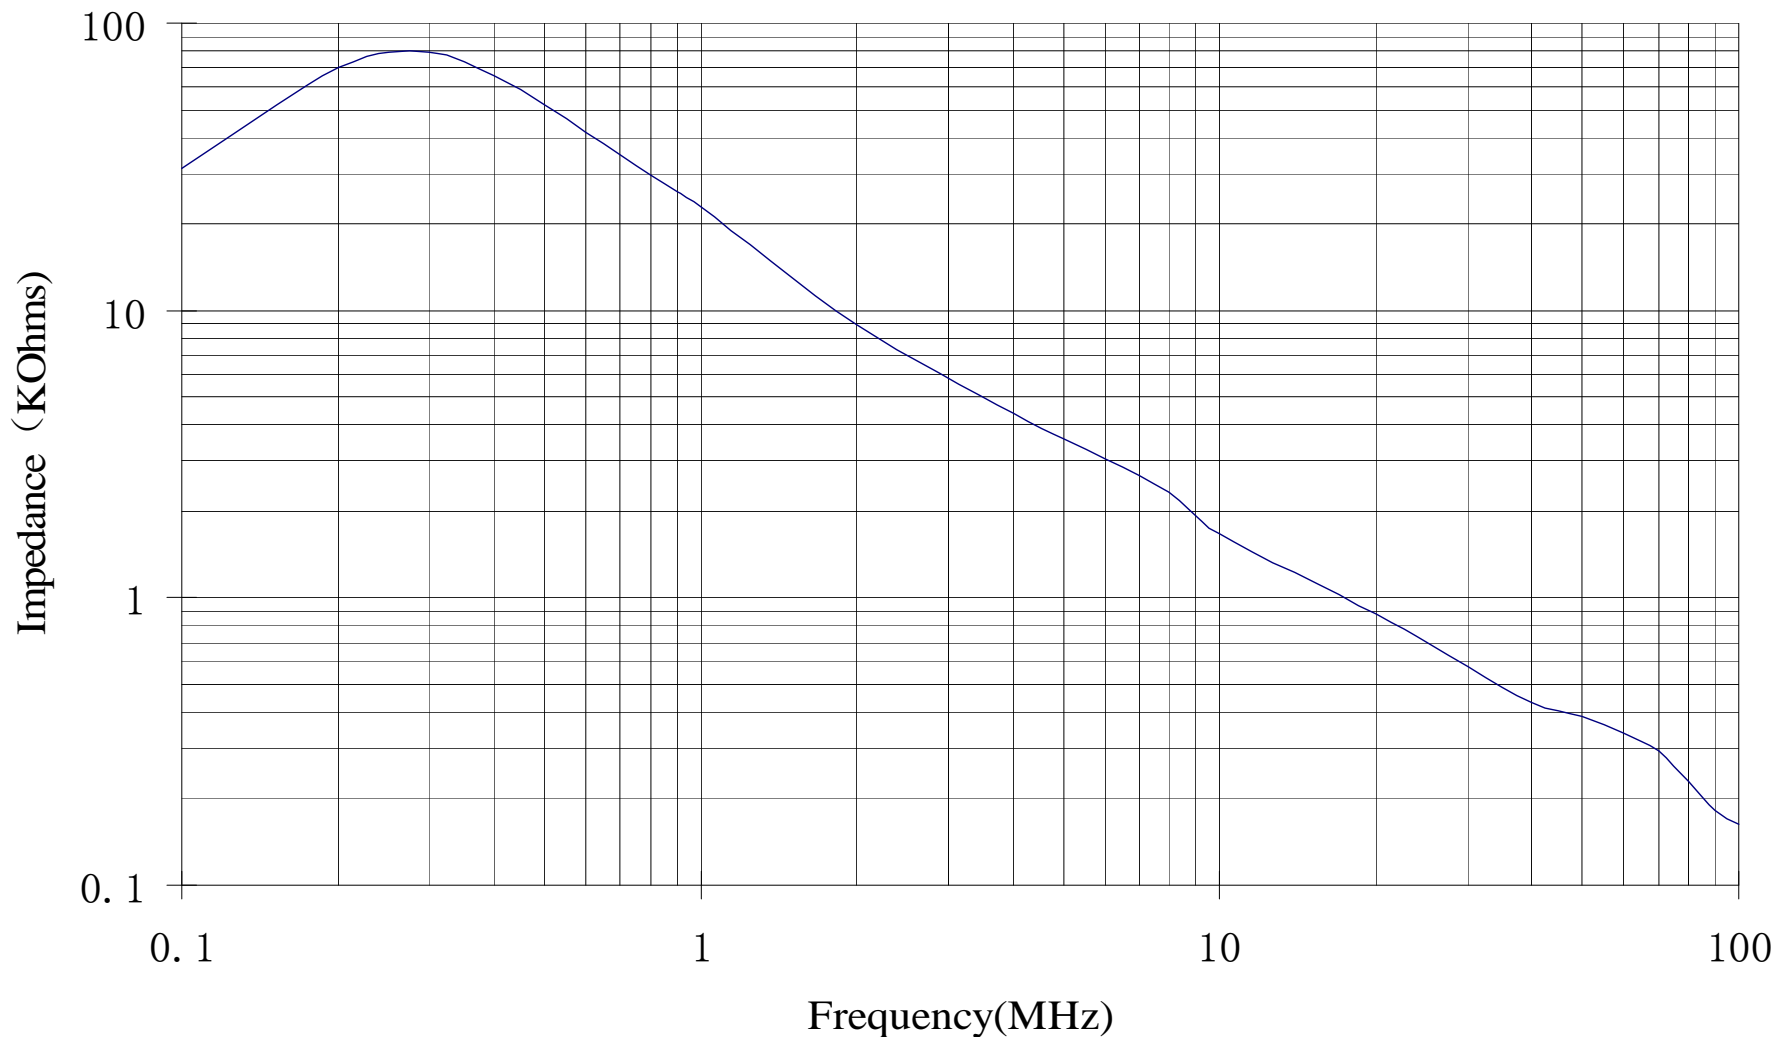

DOC. REV: A/2

XFMRs Inc www.XFMRS.com UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM	Title: LINE FILTER		
	P/N: XF0393-2801		REV. A
	DWN.	Yuan	Apr-07-15
	CHK.	YK Liao	Apr-07-15
SHEET 2 OF 2	APP.	Joe Huff	Apr-07-15