



1. Mechanical Dimensions:

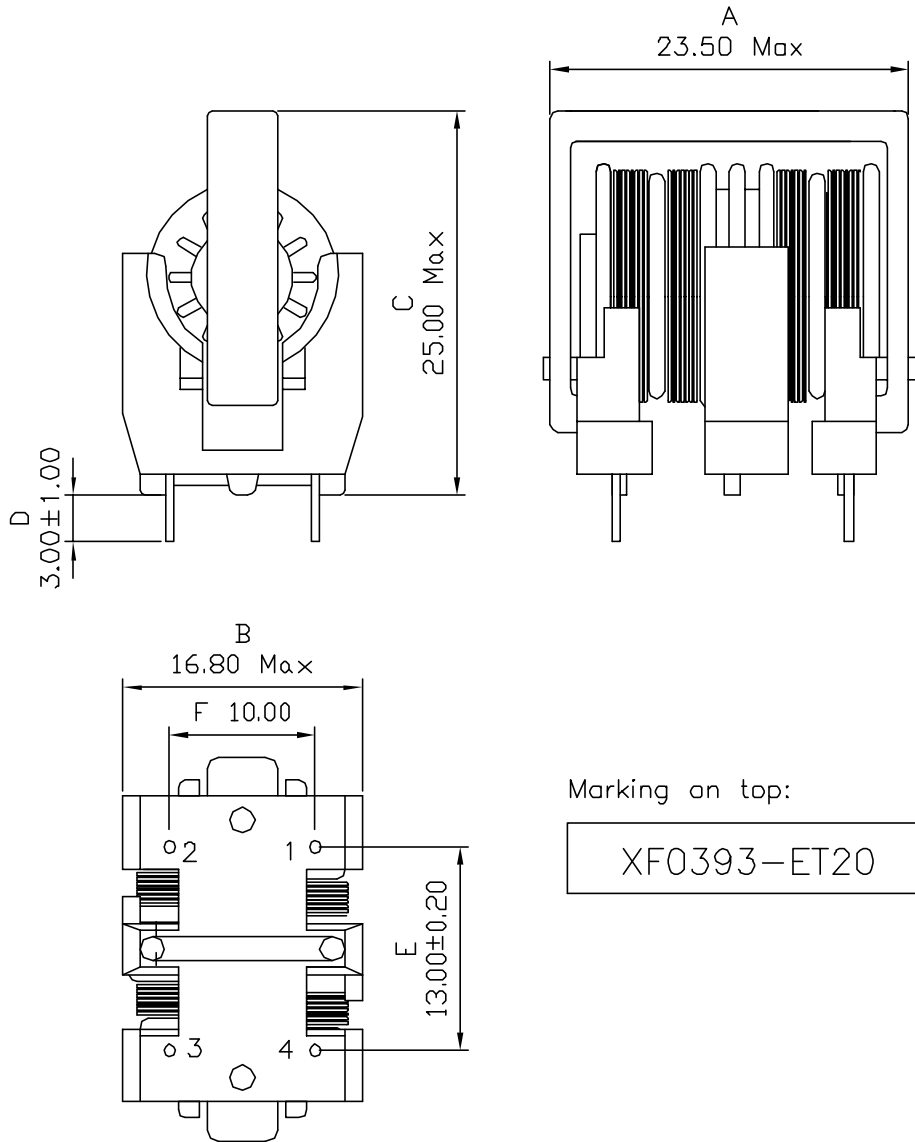

2. Schematic:

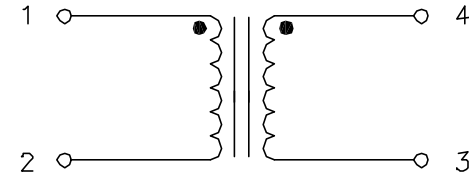

3. Electrical Specifications:

- OCL: 39mH -30%/+50% @10KHz 0.1V, Each Wdg
- LL: Pins 1-2 330uH Typ @100KHz 0.1V, Short Pins 4-3
- DCR: 1.10 Ohms Max, Each Wdg
- Irated: 0.70 Arms
- Rated Voltage: 250Vrms Max
- Isolation Voltage: 1500Vac Line to Line, 2 Seconds

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -20°C to +115°C
6. Storage Temperature Range: -55°C to +125°C

DOC REV: A/2

XFMRs Inc	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XF0393-ET20	REV. A
.xx ±0.30	DWN.	Juan Mao	Apr-05-04
Dimensions in mm	CHK.	YK Liao	Apr-05-04
SHEET 1 OF 1	APP.	Isaiah M	Apr-05-04