



1. Mechanical Dimensions:

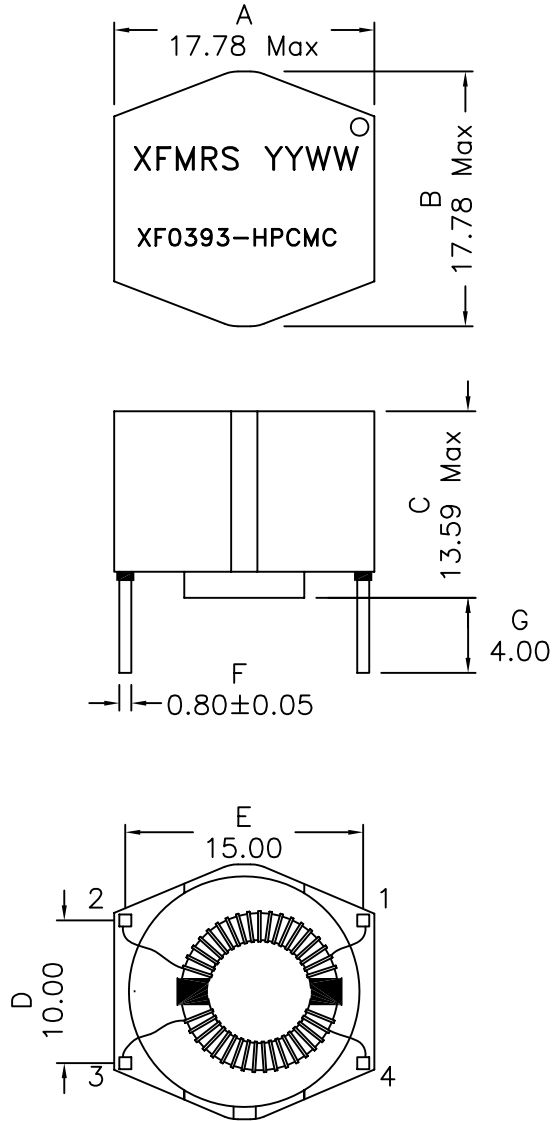

(BOTTOM VIEW)

2. Schematic:

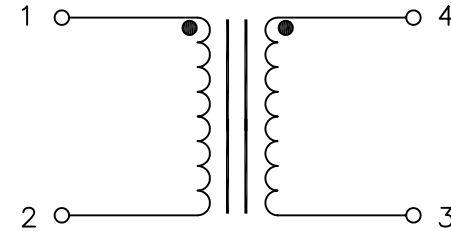

3. Electrical Specifications:@25°C

OCL: 39mH±30% @100KHz 0.1V, Each Wdg

DCR.: 2.0 Ohms Typ, Each Wdg

LL: 450uH Typ @100KHz 0.1V

Rated Current: 0.4Amps

Isolation Voltage: 1500Vac, Wdg to Wdg

Rated Voltage: 250VAC

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

XFMRS Inc. www.XFMRS.com		Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED		P/N: XF0393-HPCMC	REV. A
TOLERANCES: .xx ±0.25		DWN.	罗振江 Aug-02-10
Dimensions in MM		CHK.	廖玉坤 Aug-02-10
SHEET 1 OF 1		APP.	BW Aug-02-10

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.