

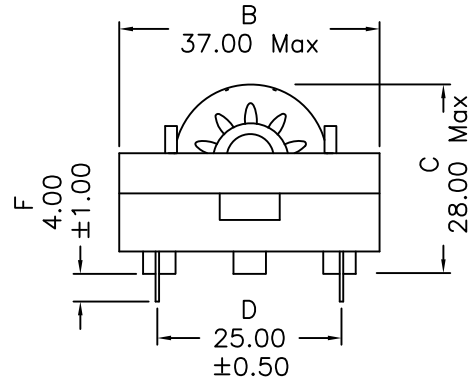


1. Mechanical Dimensions:

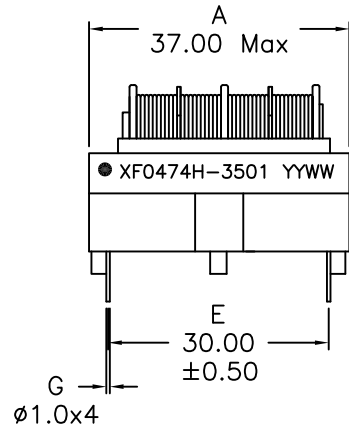


(BOTTOM VIEW)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40C to +85C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/2

2. Schematic:

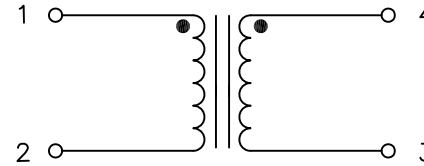

3. Electrical Specifications:

- OCL: 4.7mH Min @1KHz 0.1V, Each Wdg (25°C to 85°C)
- OCL: 1.4mH Min @1KHz 0.1V, Each Wdg (-40°C to 25°C)
- Q: 20 Min @1KHz 0.1V, Each Wdg
- DCR: 0.080 Ohms Max, Each Wdg
- Rated Current: 4.0Aac
- Hipot: 2000Vac, Wdg to Wdg, Wdgs to Core

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRS.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XF0474H-3501	REV. A
.xx ±0.30	DWN.	Yaun	Sep-16-13
Dimensions in mm	CHK.	YK Llao	Sep-16-13
SHEET 1 OF 1	APP.	Joe Huff	Sep-16-13