





1. Mechanical Dimensions:

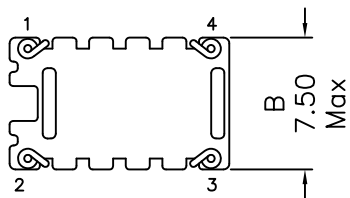


TOP VIEW

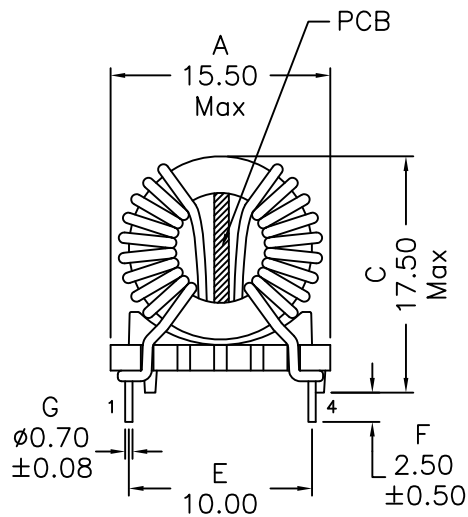

BOTTOM VIEW

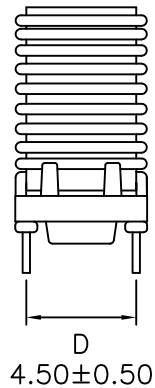

2. Schematic:



3. Electrical Specifications: @25°C

OCL: Pins 1-2 47.0uH±30% @10KHz 0.1V

Q: Pins 1-2 tbd Min @10KHz 0.1V

LL: Pins 1-2 tbd uH Max @100KHz 0.1V, Short Sec

Rated Current: 2.0A Max

Rated Voltage: 250VAC Typ

DCR: Pins 1-2 40 mOhms Max

Pins 4-3 40 mOhms Max

SRF: tbd MHz Min

Turns Ratio: (1-2):(4-3) = 1:1±2%

Hipot: 1500Vac, Pri to Sec

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C noted otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/-

XFMRs Inc www.XFMRs.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0476-VMCMC6	REV. A
TOLERANCES: .xx ±0.25	DWN.	Feng	Apr-02-15
Dimensions in MM	CHK.	YK Liao	Apr-02-15
SHEET 1 OF 2	APP.	BSJ	Apr-02-15