



1. Mechanical Dimensions:

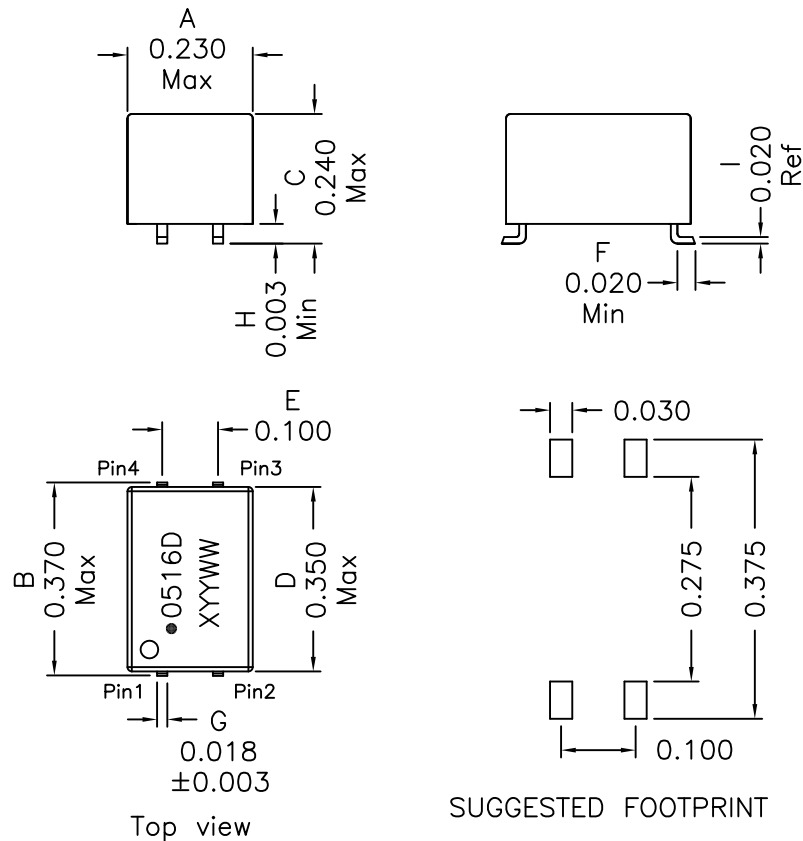

2. Schematic:



3. Electrical Specifications: @25°C

Rated Voltage: 80Vdc

Rated Current: 1.0Aac

DCR: 0.10 Ohms Max each wdg.

Impedance: 900 Ohms Typ @15MHz

Isolation resistance: 100 MOhms Min

Isolation: 300Vrms

OCL: 25uH Min @100KHz, 100mV each wdg.


Q: 8 Min @100KHz, 100mV

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +125°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component
11. Recommended IR Reflow peak temp of 250°C Max.

DOC. REV: A/4

XFMRs Inc www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF0516D-00SM	REV. A
SHEET 1 OF 2	DWN.	Yuan	Dec-17-14
	CHK.	YK Liao	Dec-17-14
	APP.	DDC	Dec-17-14

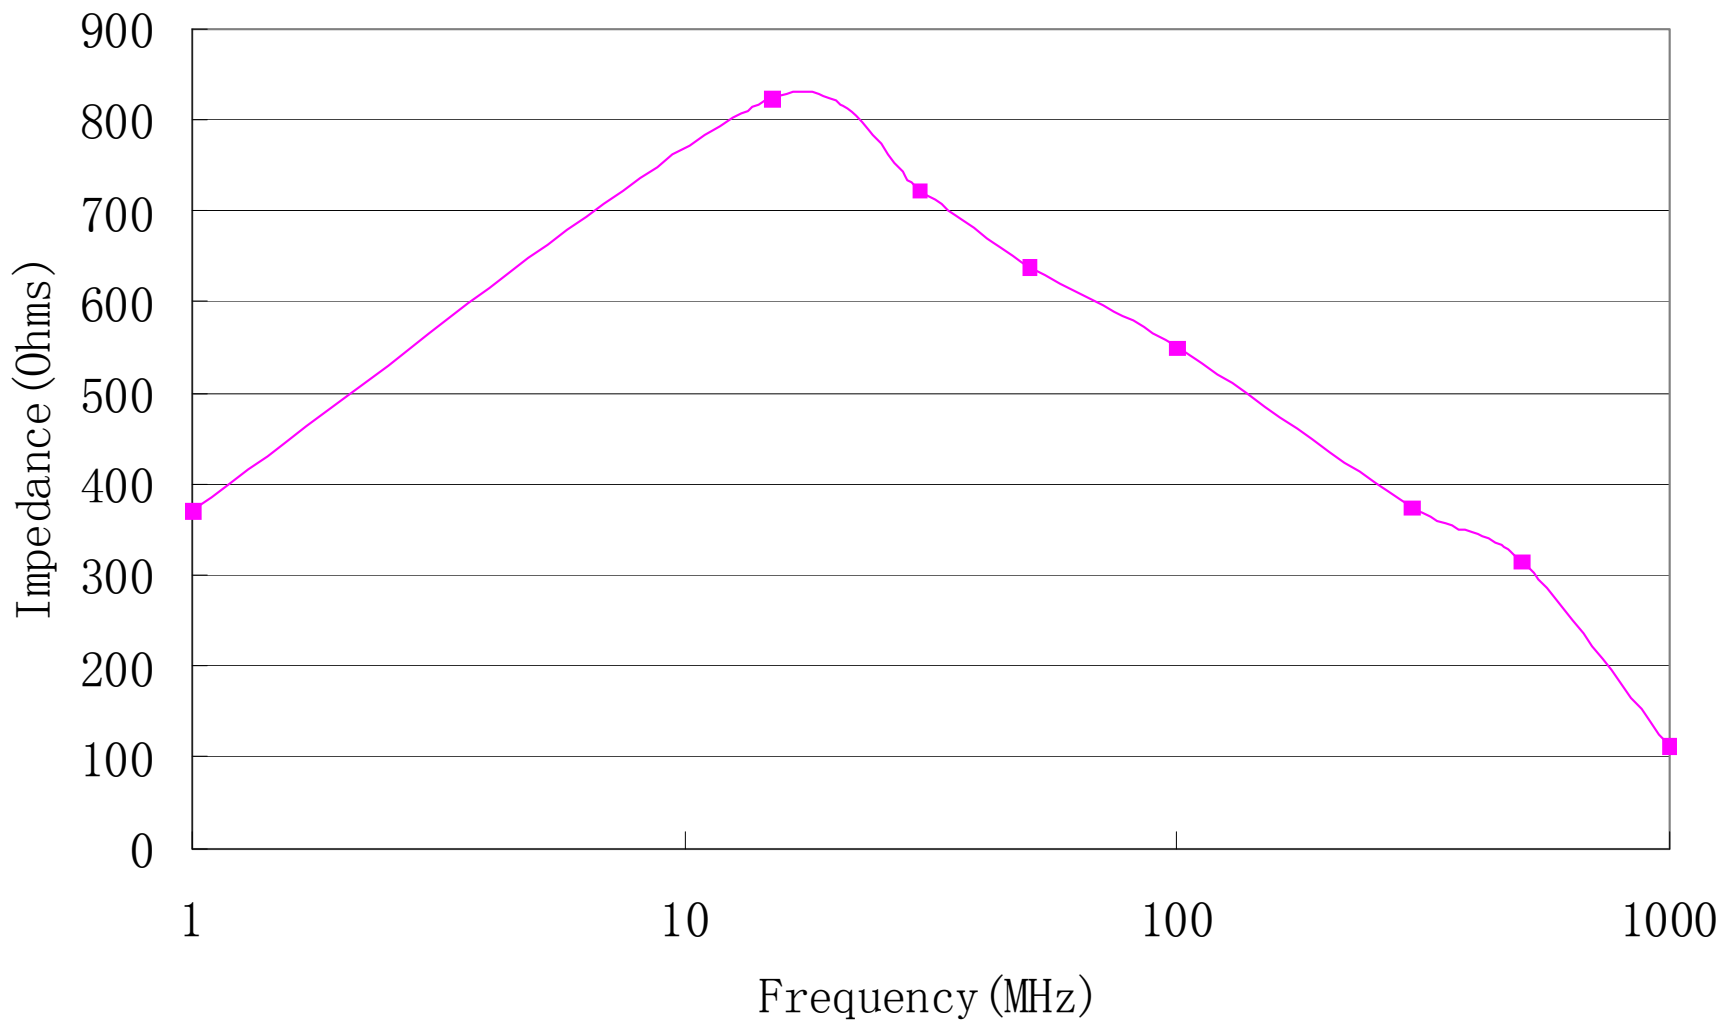

DOC. REV: A/4

XFMRs Inc www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED		P/N: XF0516D-00SM
	TOLERANCES:		REV. A
	.xxx ±0.010		
Dimensions in Inch	DWN.	Yuan	Dec-17-14
	CHK.	YK Liao	Dec-17-14
SHEET 2 OF 2	APP.	DDC	Dec-17-14

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.