
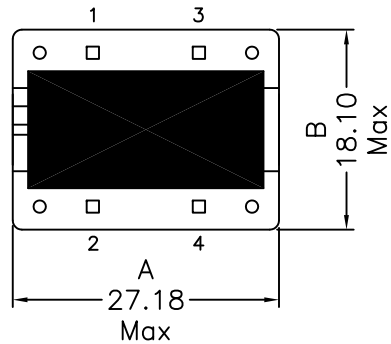


1. Mechanical Dimensions:

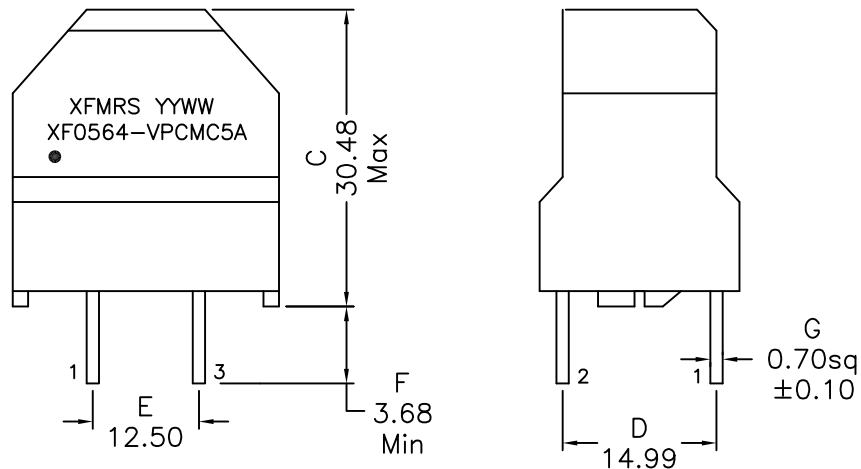


Bottom view

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

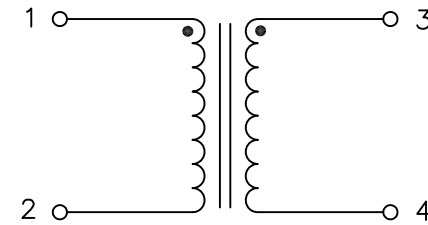

3. Electrical Specifications: @25°C

OCL: 5.60mH±30% @10KHz, 0.1V Each Wdg

1.35mH Min @10KHz, 0.1V Each Wdg -40°C to 0°C

Q: 5 Min @10KHz, 0.1V Each Wdg

DCR: 0.105 Ohms Max Each Wdg.

Irated: 2.50Arms


Hipot: 1500Vac, Wdg to Wdg

DOC. REV: A/3

XFMRs Inc www.XFMRs.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0564-VPCMC5A	REV. A
SHEET 1 OF 2	DWN.	Yuan	Oct-07-14
	CHK.	YK Liao	Oct-07-14
	APP.	BW	Oct-07-14

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

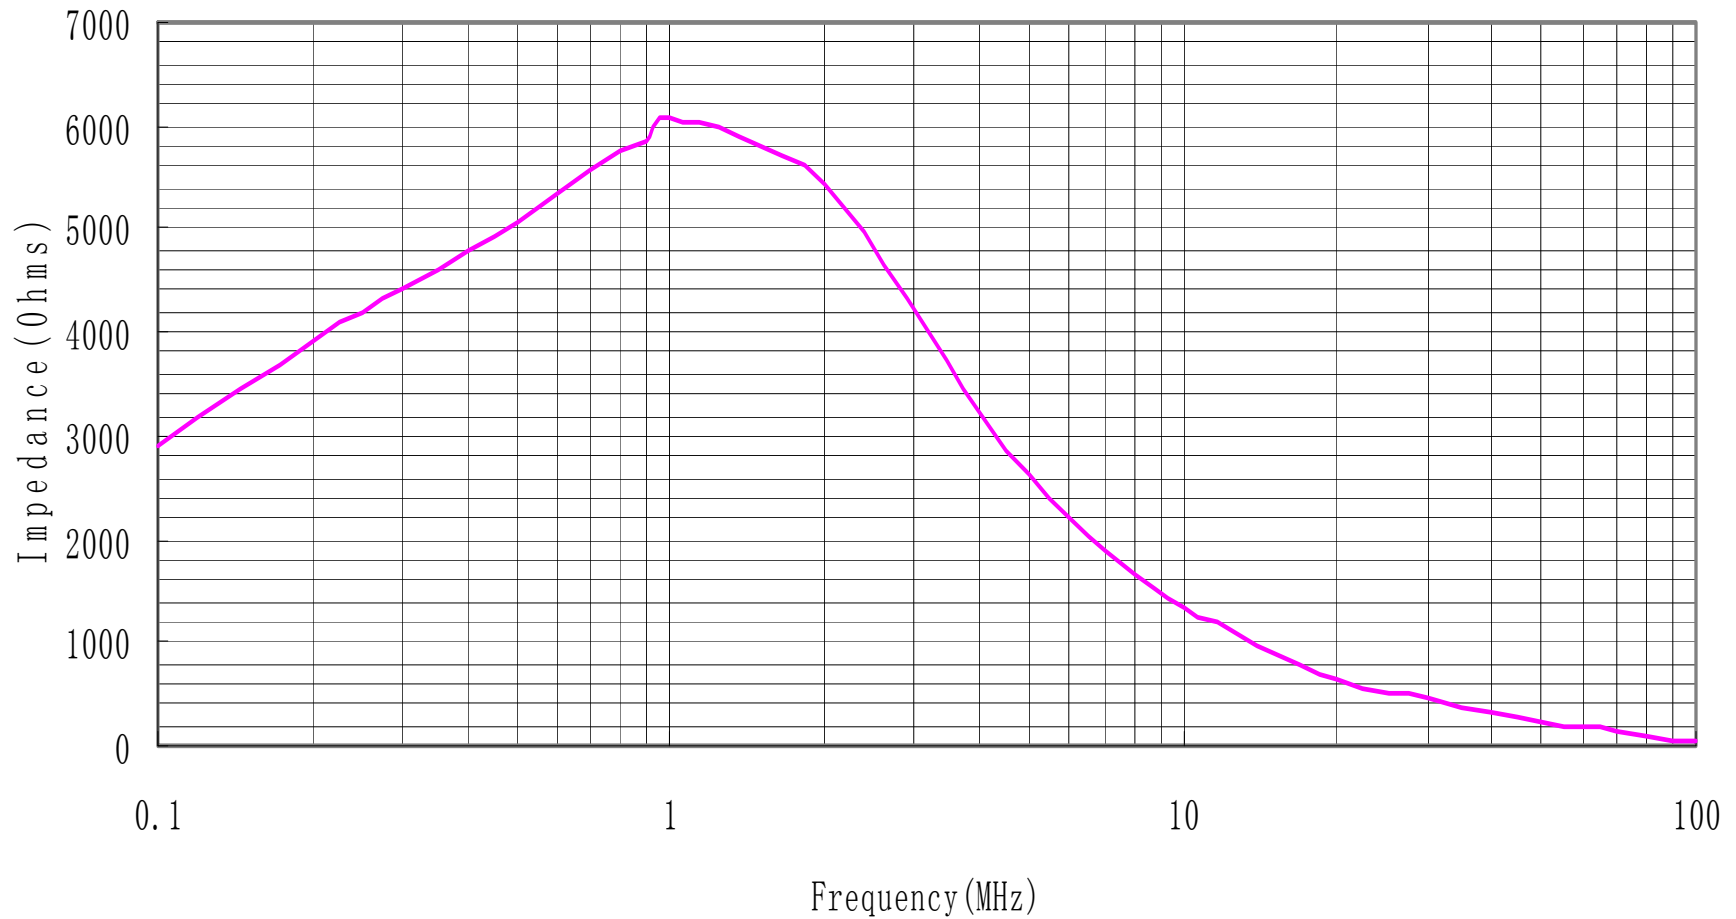

DOC. REV: A/3

XFMRs Inc www.XFMRs.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XF0564-VPCMC5A REV. A
SHEET 2 OF 2	DWN.	Yuan	Oct-07-14
	CHK.	YK Liao	Oct-07-14
	APP.	BW	Oct-07-14

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.