



1. Mechanical Dimensions:

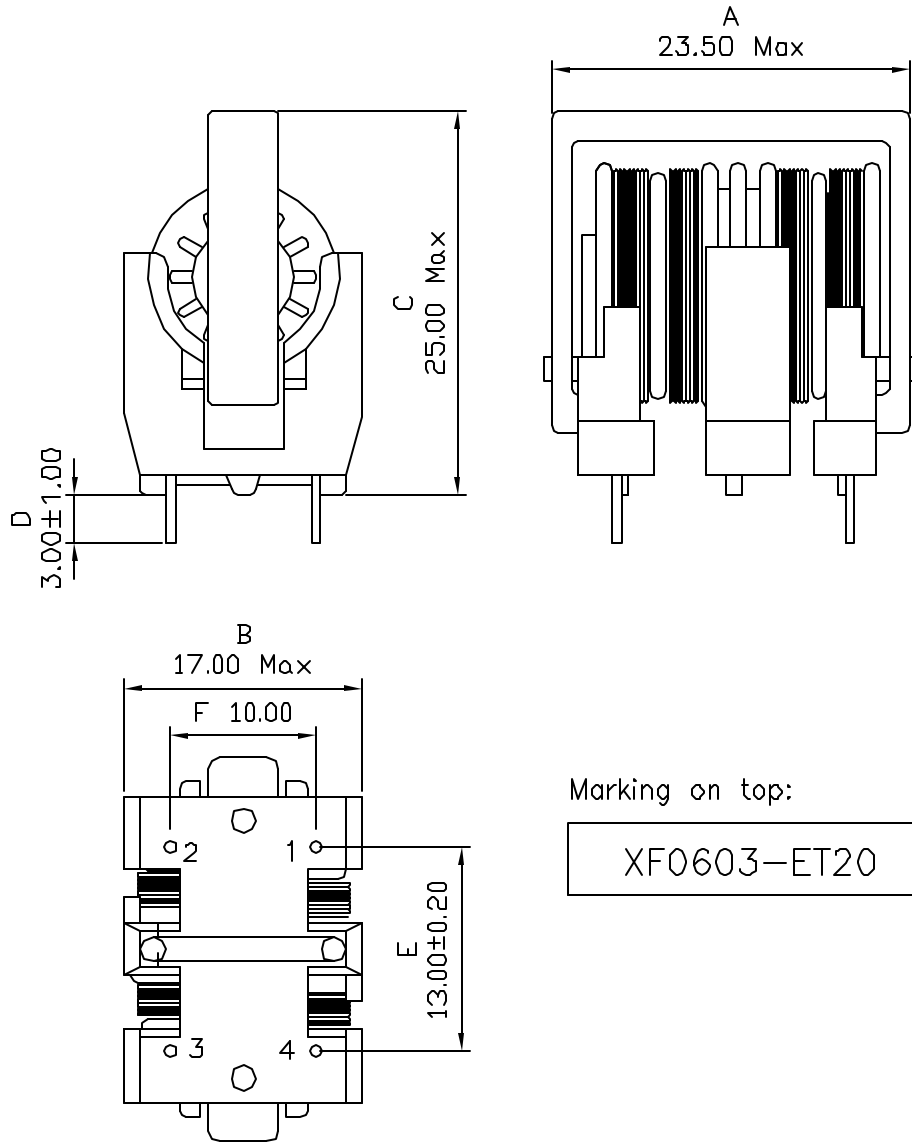

2. Schematic:

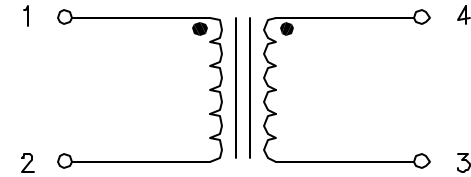

3. Electrical Specifications:

ACL: 60mH Min @10KHz 0.1V, Each Wdg

DCR: 3.154 Ohms±20%, Each Wdg

Rated: 0.30 Arms

Rated Voltage: 250Vrms Max

Isolation Voltage: 1500Vac Line to Line, 2 Seconds

Notes:

1. Solderability: Leads shall meet MIL-STD-202C, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/2

| | | | |
|--|--------------------|----------|-----------|
| XFMRs Inc www.XFMRs.com | Title: LINE FILTER | | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm | P/N: XF0603-ET20 | | REV. A |
| | DWN. | Juan Mao | Nov-17-06 |
| | CHK. | YK Liao | Nov-17-06 |
| SHEET 1 OF 1 | APP. | MS | Nov-17-06 |