
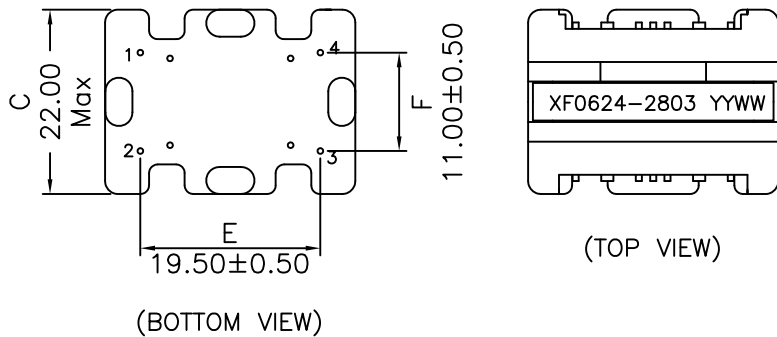



**1. Mechanical Dimensions:**

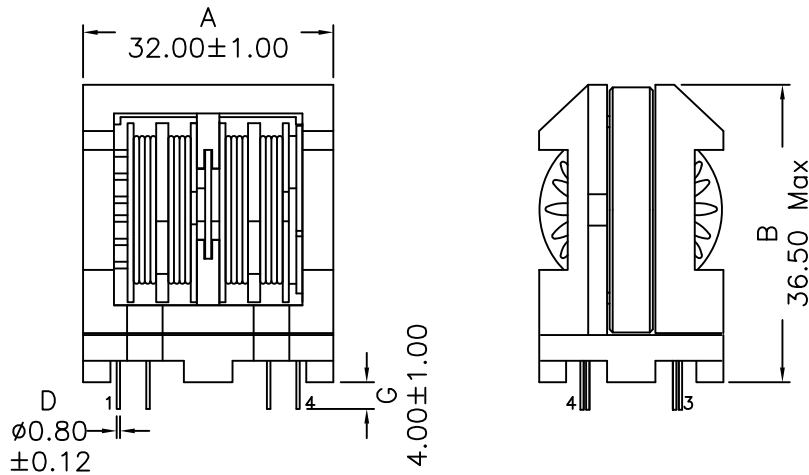

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating temperature: -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

**2. Schematic:**

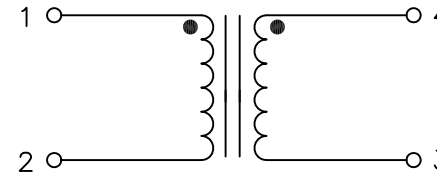

**3. Electrical Specifications: @25°C**

OCL: 6.20mH Min @10KHz, 0.1V Each Wdg

Q: Pins 1-2 tbd Min @10KHz 0.1V

LL: Pins 1-2 tbd Max @100KHz, 0.1V short P4+3

DCR: 0.111 Ohms ±20%, Each Wdg @20°C

Current Max: 2.20Arms

SRF: Pins 1-2 tbd Min

Turns Ratio: (1-2):(4-3)=1.00:1.00±2%

Hipot: 2000Vac, Wdg to Wdg, 1Min

**PRELIMINARY**

DOC. REV: A/-

<b>XFMRs Inc</b> www.XFMRs.com  UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM  SHEET 1 OF 1	Title: LINE FILTER		
	P/N: XF0624-2803		REV. A
	DWN.	Mei Chen	Feb-20-17
	CHK.	YK Liao	Feb-20-17
APP.	BSJ	Feb-20-17	

**PROPRIETARY**

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.