



### 1. Mechanical Dimensions:

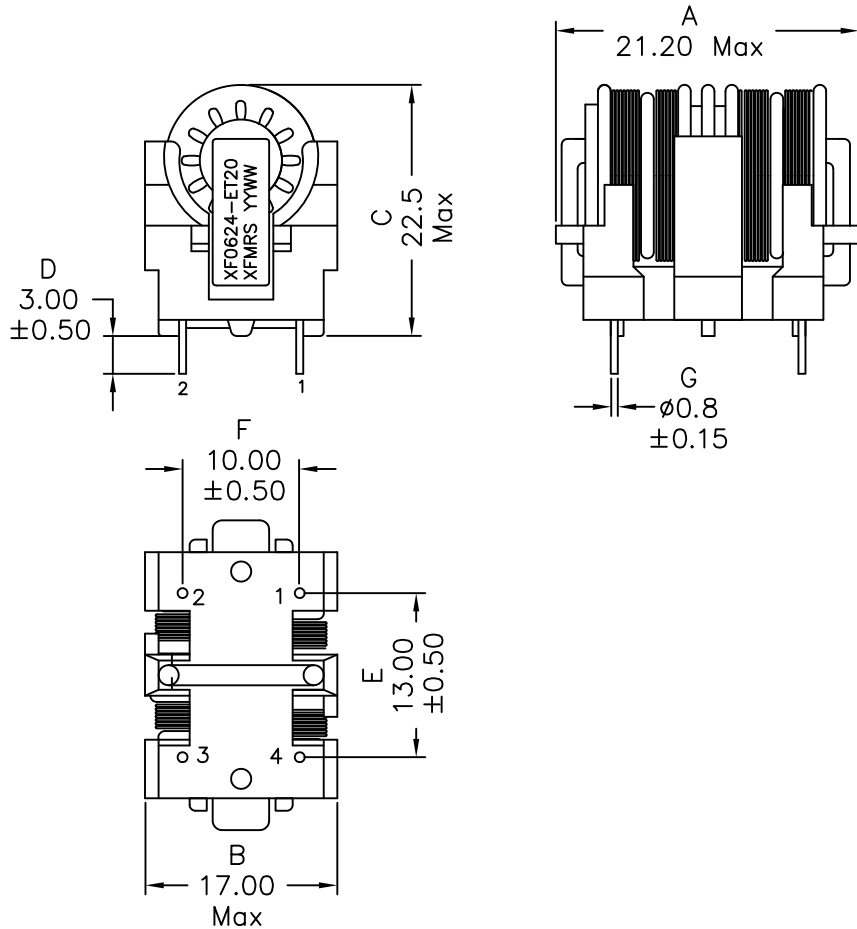

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +120°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +85°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

### 2. Schematic:

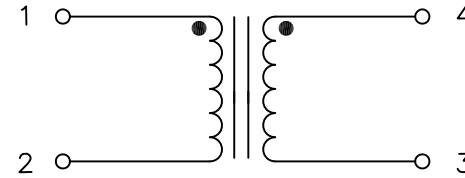

### 3. Electrical Specifications:

- OCL: 6.2mH Min @1KHz 0.1V, Each Wdg
- Q: Pins 1-2 tbd Min @1KHz 0.1V
- LL: Pins 1-2 tbduH Min @1KHz 0.1V, Short 4+3
- DCR: 0.5 Ohms Max, Each Wdg
- IDC: 1.0Arms Max
- Rated Voltage: 250Vac/dc
- Isolation Voltage: tbd Wdg to Wdg

PRELIMINARY

DOC. REV: A/-

<b>XFMRs Inc</b> www.XFMRS.com	Title: LINE FILTER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	P/N: XF0624-ET20	REV. A
SHEET 1 OF 1	DWN.	Feng	Oct-05-15
	CHK.	YK Liao	Oct-05-15
	APP.	GL	Oct-05-15