

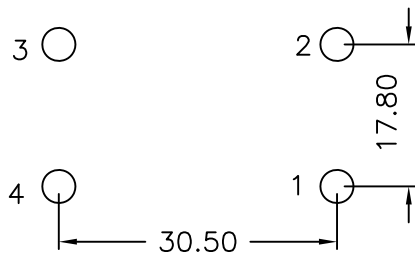


1. Mechanical Dimensions:

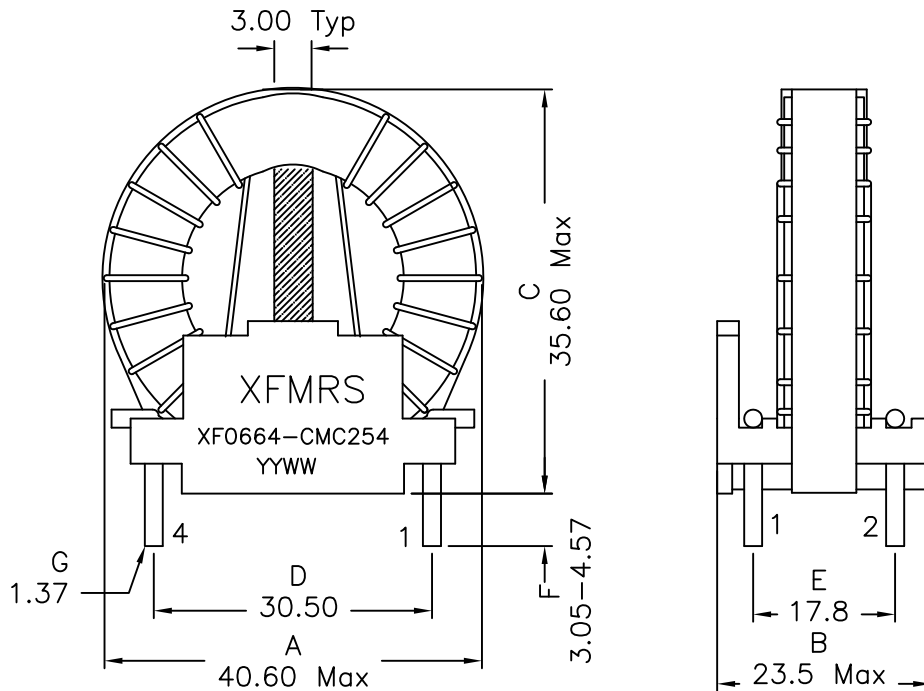

(SUGGESTED FOOTPRINT)

2. Schematic:

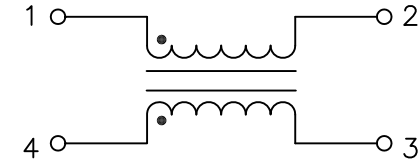

3. Electrical Specifications:

OCL: EACH WDG, 6.6mH Min @15.750KHz, 0.1V

DCR: EACH WDG, 0.048 OHMS Max

Q: 18 Min @10KHz, 0.1V Each Wdg.

LEAKAGE L: 49uH Max 100KHz, 0.1V

ISOLATION: 1250VAC, 1 min

Current Rating: 6Arms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV.: A/1

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED	P/N: XF0664-CMC254	REV. A	
TOLERANCES: .xxx ±0.25	DWN.	Xiany	Oct-03-12
Dimensions in MM	CHK.	YK Liao	Oct-03-12
SHEET 1 OF 1	APP.	Joe Huff	Oct-03-12