

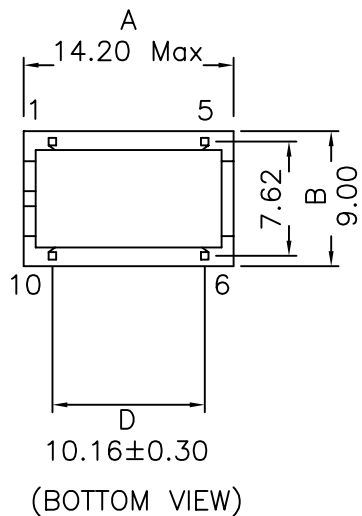
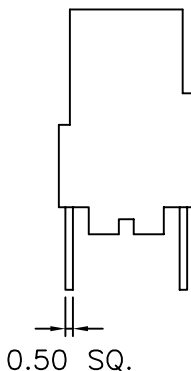



1. Mechanical Dimensions:



2. Schematic:



3. Electrical Specifications: @25°C

OCL: 70mH+50%-30% @10KHz 0.1V, Each Wdg

DCR: 2.10 Ohms Typ, Each Wdg

Turns Ratio: 1:1

HIPOT: 500Vrms, Wire to Wire

Notes:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible

DOC. REV A/2

XFMRs Inc.	Title: Common Mode Choke	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.25 Dimensions in MM	P/N: XF0703-VPCMC3 REV. A
	DWN.	廖玉坤 Jan-10-03
	CHK.	李清儿 Jan-10-03
	APP.	Isaiah M Jan-10-03
SHEET 1 OF 1		