

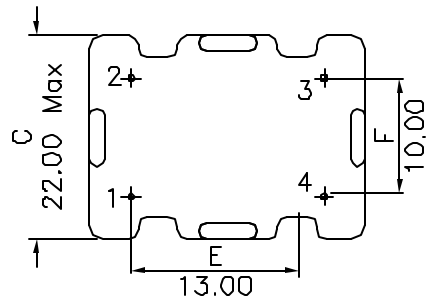
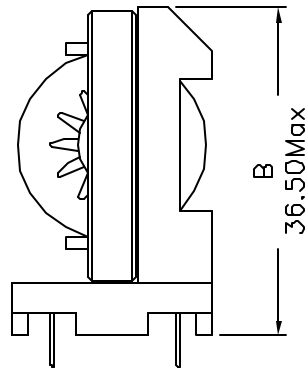



1. Mechanical Dimensions:

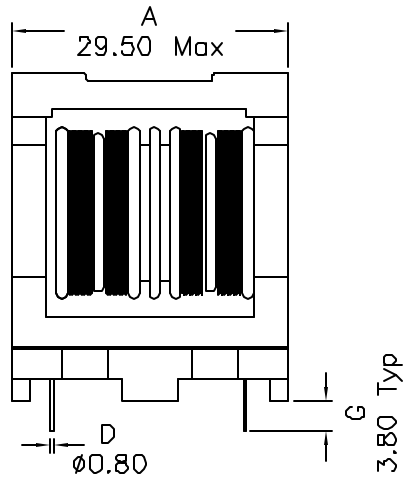

(BOTTOM VIEW)



2. Schematic:

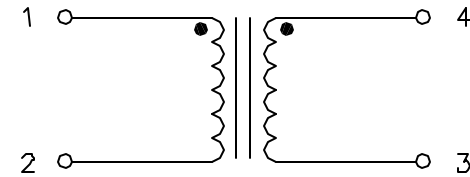

3. Electrical Specifications:

OCL: 7.5mH Min @10KHz 0.1V, Each Wdg

DCR: 0.150 Ohms Max, Each Wdg

I_{rms}: 2.27Arms Max

Hipot: 2500Vac, Wdg to Wdg

Turns Ratio: (1-2):(4-3) = 1.0 : 1.0

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 26%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C

DOC REV: A/2

XFMRs Inc	Title: LINE FILTER	
	P/N: XF0754-2801	REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	DWN.	罗振江 May-29-03
	CHK.	廖玉坤 May-29-03
SHEET 1 OF 1	APP.	Joe Huff May-29-03