




1. Mechanical Dimensions:

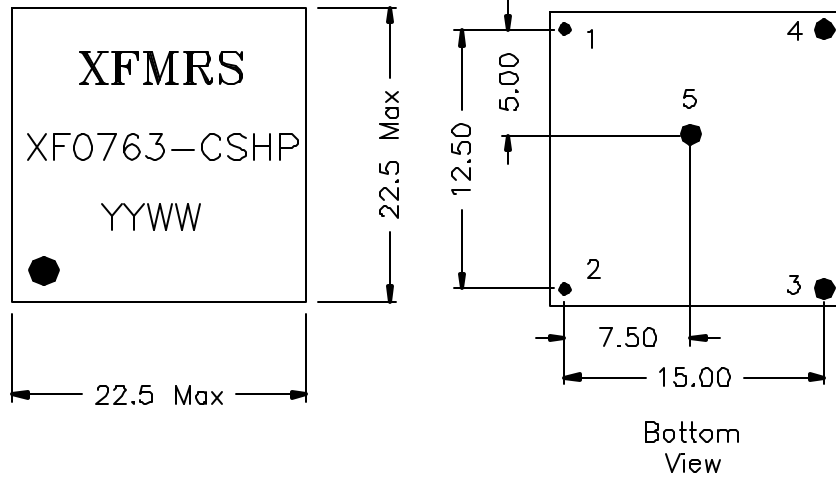

Pin numbers are for reference only and will not appear on the device.

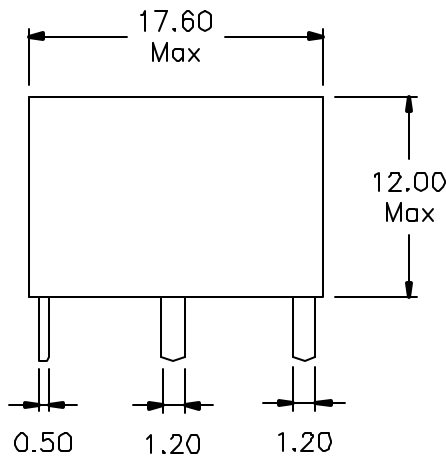

2. Schematic:

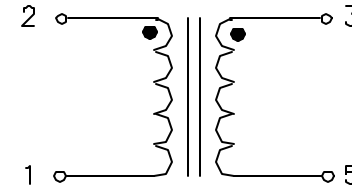

3. Electrical Specification:

OCL: 2-1 76mH Min @10KHz 0.010V

DCR: 2-1 4.50 Ohms Max

Turns Ratio: 2-1:3-5 200:1

V_{CT}: 700uVs Max

Ipri: 25A Max

Isolation: 4000VAC, Pri to Sec

Notes.

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability, UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

Doc Rev: A/1

XFMRS Inc.	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 INCH Dimensions in MM	P/N: XF0763-CSHP	REV. A
	DWN.	李清儿	Jan-25-00
	CHK.	孙怡	Jan-25-00
	APP.	BW	Jan-25-00