
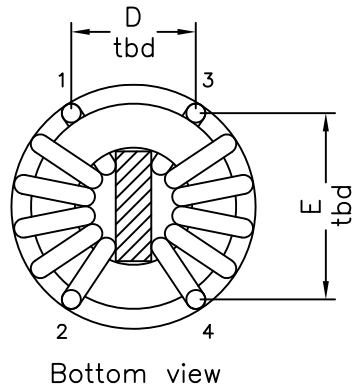
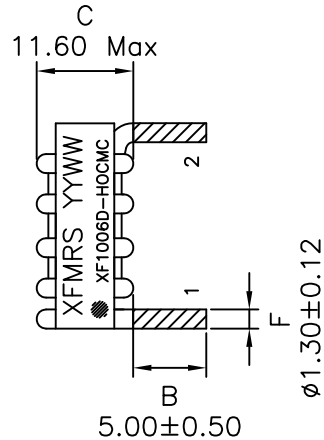



1. Mechanical Dimensions:

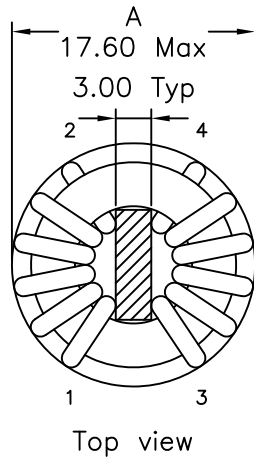

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

2. Schematic:

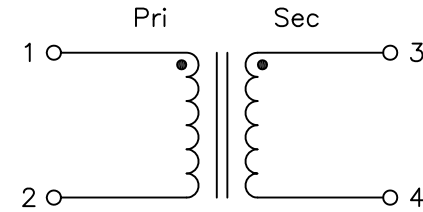

3. Electrical Specifications: @25°C

OCL: Pins 1-2 100uH Min @10KHz 0.1V

Q: Pins 1-2 tbd Min @10KHz 0.1V

DCR: Pins 1-2 1.75mOhms Max

Pins 3-4 1.75mOhms Max

Rated Current: 9Adc (Balanced)

Turns Ratio: (1-2):(3-4)=1.00:1.00±2%

Hipot: 500Vac, Pri to Sec

PRELIMINARY

DOC. REV: A/-

XFMRs Inc www.XFMRs.com	Title: CMC		
UNLESS OTHERWISE SPECIFIED	P/N: XF1006D-HOCMC	REV. A	
TOLERANCES: .xx ±0.25	DWN.	Yuan	Oct-10-13
Dimensions in MM	CHK.	YK Liao	Oct-10-13
SHEET 1 OF 1	APP.	BW	Oct-10-13