



1. Mechanical Dimensions:

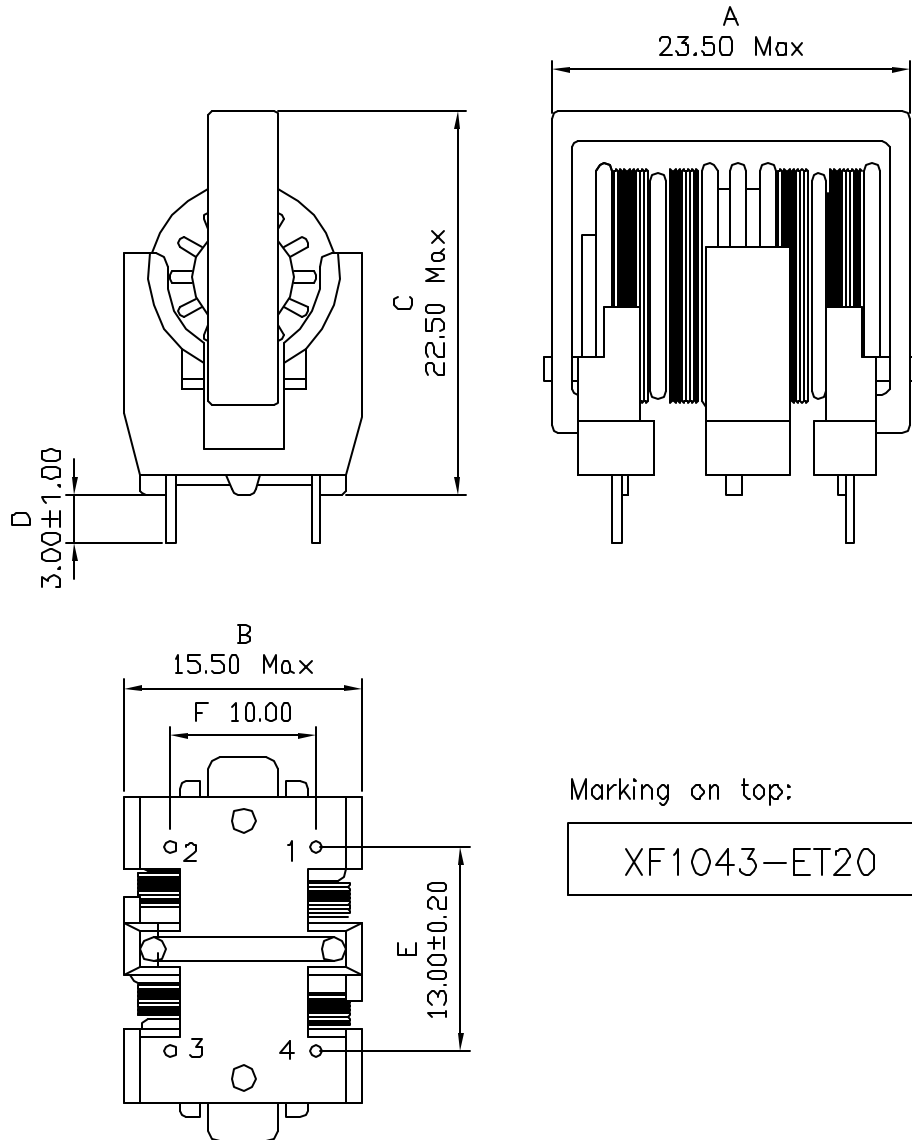

2. Schematic:

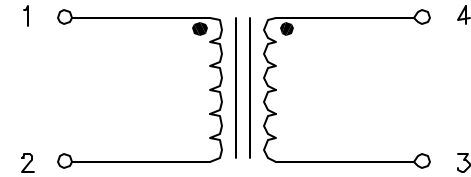

3. Electrical Specifications:

ACL: 104mH Min @10KHz 0.1V, Each Wdg

DCR: 7.543 Ohms±20%, Each Wdg

Irated: 0.20 Arms

Rated Voltage: 250Vrms Max

Isolation Voltage: 1500Vac Line to Line, 2 Seconds

Notes:

1. Solderability: Leads shall meet MIL-STD-202C, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

XFMRs Inc www.XFMRs.com	Title: LINE FILTER		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	P/N: XF1043-ET20	REV. A	
	DWN.	Juan Mao	Oct-24-06
	CHK.	YK Liao	Oct-24-06
SHEET 1 OF 1	APP.	BW	Oct-24-06