
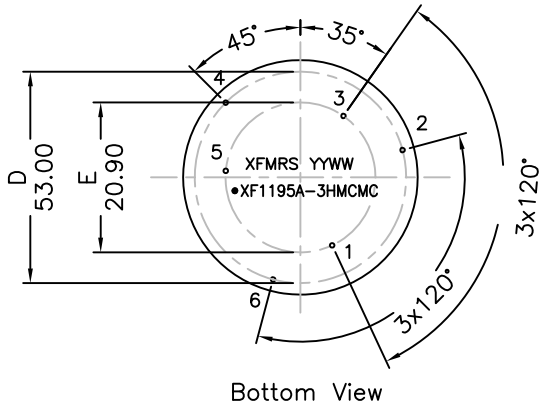
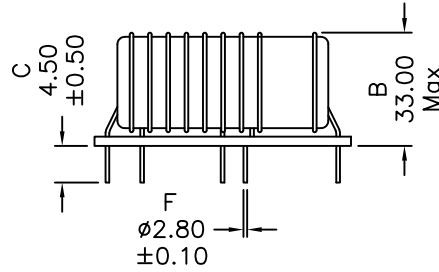



1. Mechanical Dimensions:

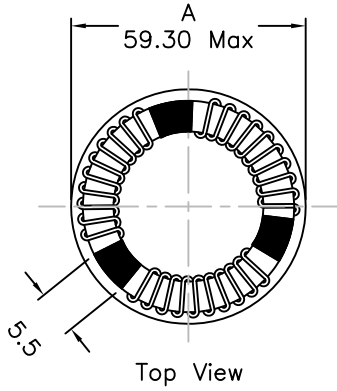

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -25°C to +40°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. The core must be mummy wrapped with Kapton tape prior to winding

2. Schematic:

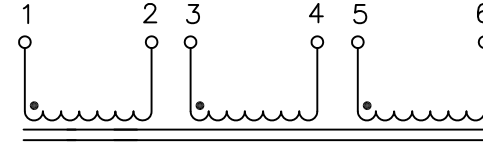

3. Electrical Specifications:

- OCL: 1.19mH +50/-30% @10KHz 0.1V, Each wdg
 Q: Pins 1-2 tbd @100KHz 0.1V
 LL: Pins 1-2 4uH Typ @100KHz 0.1V, Short all else
 DCR: 1.7 mOhms Max, Each Wdg
 Rated Current: 32A
 Turns Ratio: (1-2):(3-4):(5-6) = 1:1:1±2%
 Hipot: 2300Vac, wdg to wdg

DOC. REV. A/-

XFMRs Inc www.XFMRS.com	Title: 3-Phase Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM	P/N: XF1195A-3HMCMC	REV. A
	DWN.	Feng	Apr-02-15
	CHK.	YK Liao	Apr-02-15
SHEET 1 OF 1	APP.	DDC	Apr-02-15

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.