



1. Dimensions:

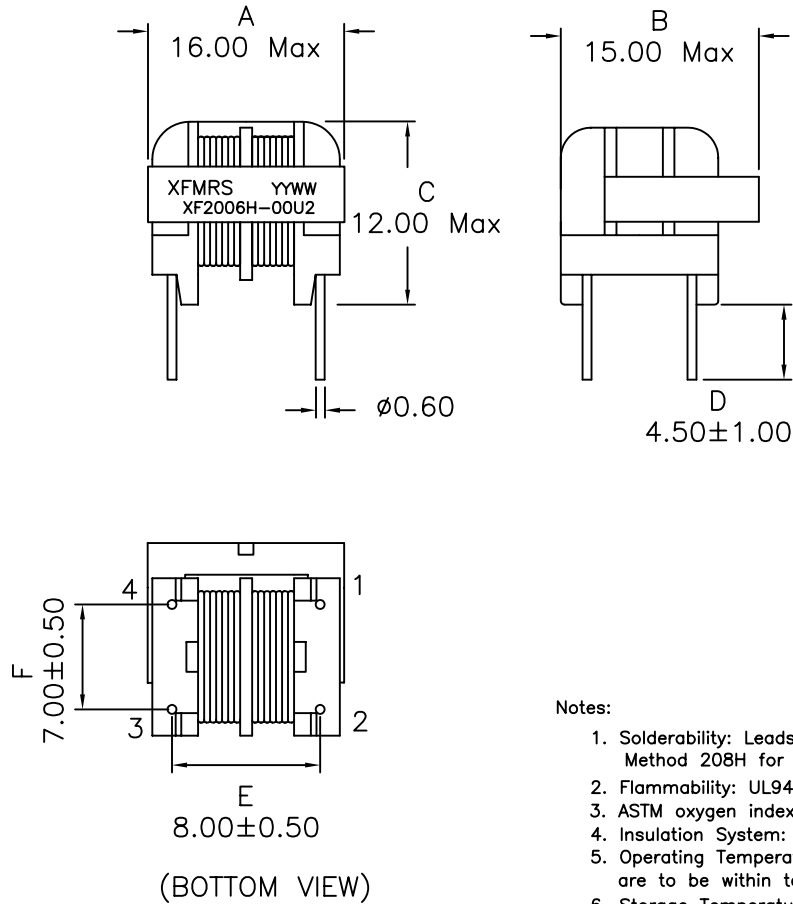

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

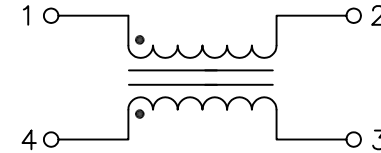

3. Electrical Specifications:

Turn Ratio: (PIN1-2) : (PIN4-3) = 1:1±1%

Inductance: 200uH Min. @10KHz 0.1V

Leakage Inductance: 25uH Max. @10KHz 0.1V

PIN1-2, PIN4-3 DC Resistance: 0.1 ohms Max.

Rated Current: 1.60Arms

Hipot: 2000VAC (PIN1-2 TO PIN4-3)

Hipot: 2000VAC (Windings to Core)

Rated Voltage: 250VAC Max

Impedance: 5.4KOhms Max @1500KHz

DOC. REV: A/1

XFMRs Inc	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM	P/N: XF2006H-00U2	REV. A
SHEET 1 OF 1	DWN.	李小锋	Sep-20-10
	CHK.	廖玉坤	Sep-20-10
	APP.	BW	Sep-20-10