



1. Mechanical Dimensions:

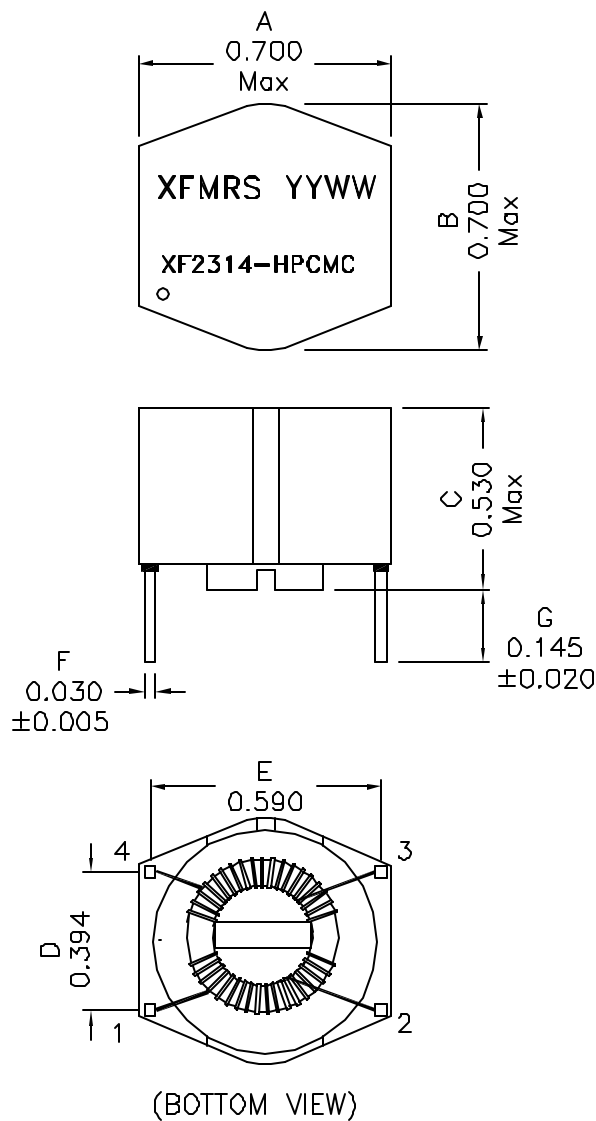

2. Schematic:

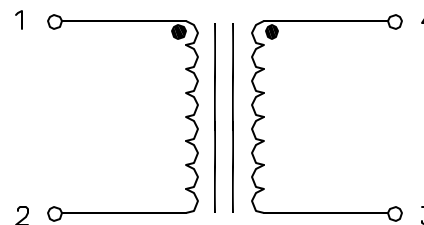

3. Electrical Specifications: @25°C

OCL: 23.1mH+50-30% @1KHz 0.1V Each Wdg.

DCR.: 0.175 Ohms Max Each Wdg.

Rated Current: 1.3Amps

Isolation Voltage: 1500Vac, Wdg. to Wdg.

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +105°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004*(0.1D2mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

XFMR5 Inc. www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020	P/N: XF2314-HPCMC	REV. A
Dimensions in INCH	DWN.	李小锋	Dec-18-07
SHEET 1 OF 1	CHK.	廖玉坤	Dec-18-07
	APP.	MS	Dec-18-07

DOC. REV A/2