
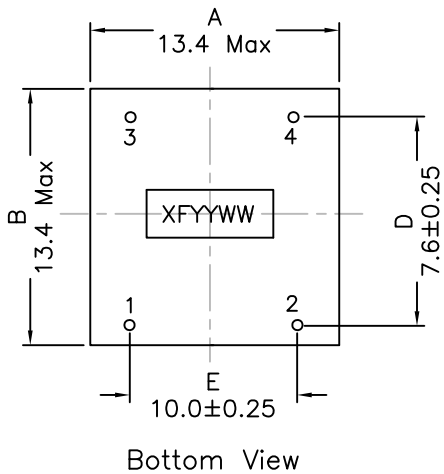



### 1. Mechanical Dimensions:

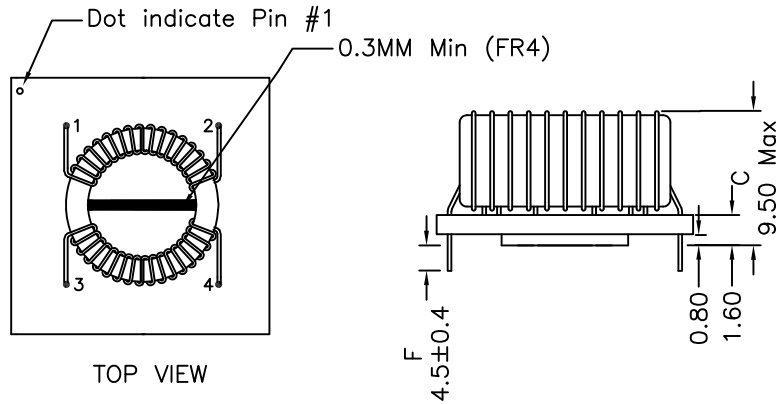

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

### 2.Schematic:



### 3.Electrical Specifications: @25°C

OCL: 240uH Min@10KHz, 10mV Each Wdg.

Q: Pins 1-2 15 Min @10KHz 10mV

DCR: 1-2 = 3-4 = 0.020 Ohms Max

ISOLATION VOLTAGE: 500Vac, WDG. TO WDG.

ALL WDGs. TO CORE

MATERIAL: TOROID W41003-TC MAGNETICS OR EQUAL

WIRE: 0.6MM

BASE: FR4

DOC. REV: B/6

<b>XFMRs Inc</b> www.XFMRS.com	Title: <b>Common Mode Choke 0.24mH</b>			
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM		P/N: XF2406-CMC DWN. Yuan CHK. YK Liao APP. BSJ	REV. B Oct-31-12 Oct-31-12 Oct-31-12
SHEET 1 OF 1		Title: <b>Common Mode Choke 0.24mH</b>		

**PROPRIETARY**

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.