



1. Mechanical Dimensions:

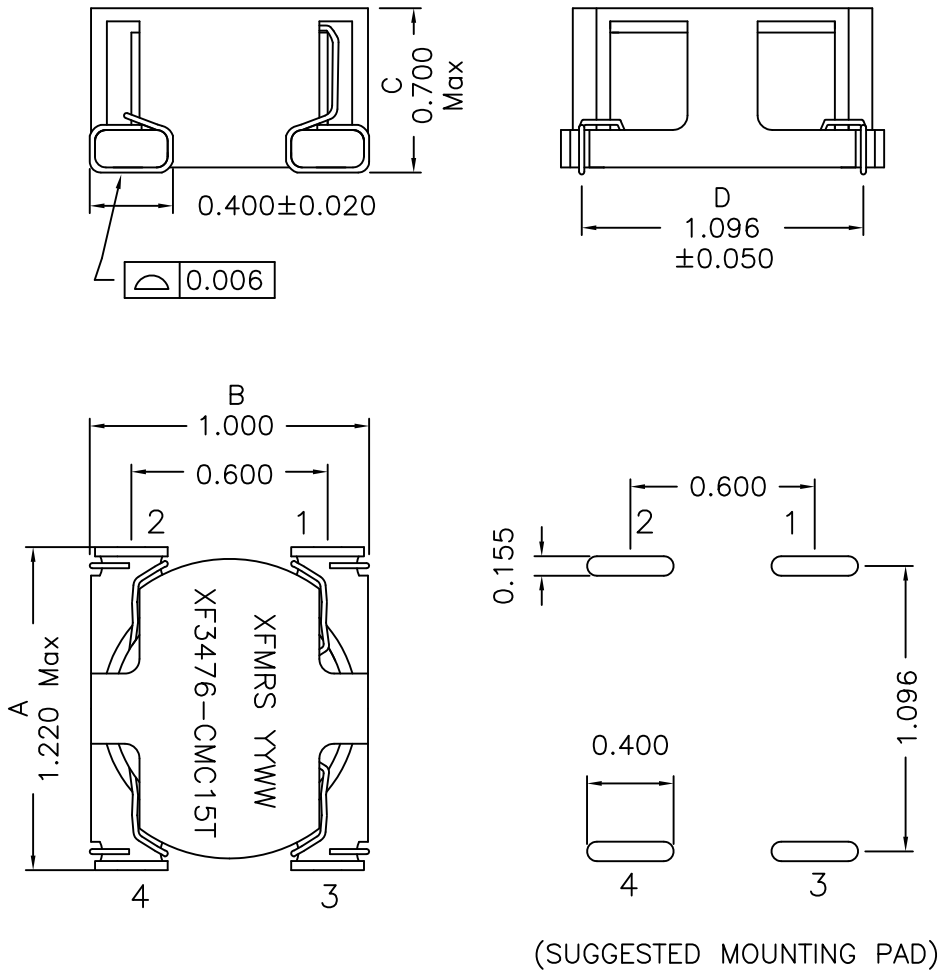

2. Schematic:

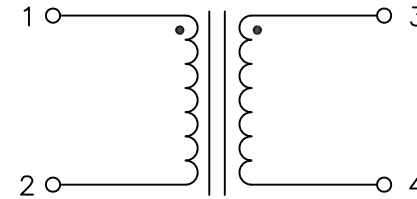

3. Electrical Specifications: @25°C

- OCL: 260uH Min @10KHz, 0.1V Each Wdg
100-600uH Min @10KHz, 0.1V Each Wdg (-40 to +85°C)
- Q: 8.0 Min @10KHz, 0.1V Each Wdg
- SRF: 1.2MHz Min Each Wdg
- DCR: 4.0 mOhms Max, Each Wdg
- Turns Ratio.: (1-2):(3-4)=1:1±2%
- Rated Current: 20Adc
- Hipot: 1500Vac Wdg to Wdg

Notes:


1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

XFMR5 Inc www.XFMR5.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED	P/N: XF3476-CMC15T	REV. A
TOLERANCES: .xxx ±0.010	DWN.	Yuan	Jul-08-15
Dimensions in Inch	CHK.	YK Liao	Jul-08-15
SHEET 1 OF 2	APP.	Joe Huff	Jul-08-15

DOC. REV: A/1

PROPRIETARY

Document is the property of XFMR5 Group & is not allowed to be duplicated without authorization.

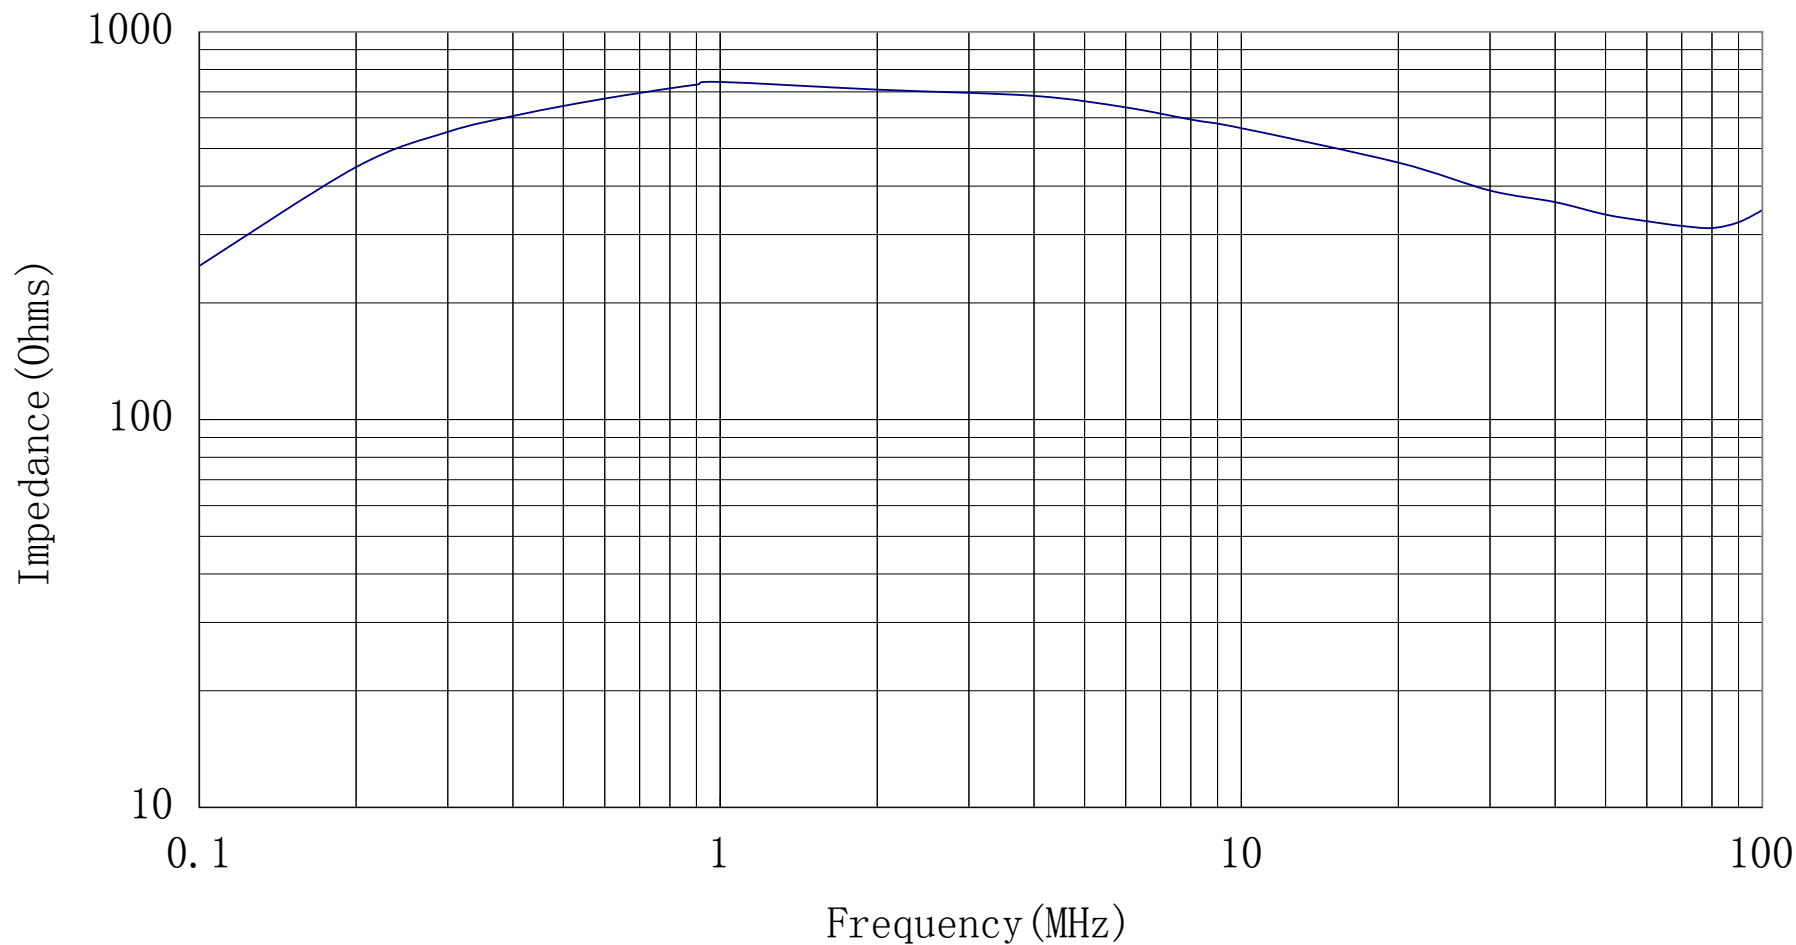

DOC. REV: A/1

XFMRs Inc www.XFMRs.com	Title: COMMON MODE CHOKE		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch		P/N: XF3476-CMC15T REV. A
SHEET 2 OF 2	DWN.	Yuan	Jul-08-15
	CHK.	YK Liao	Jul-08-15
	APP.	Joe Huff	Jul-08-15

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.