



1. Mechanical Dimensions:

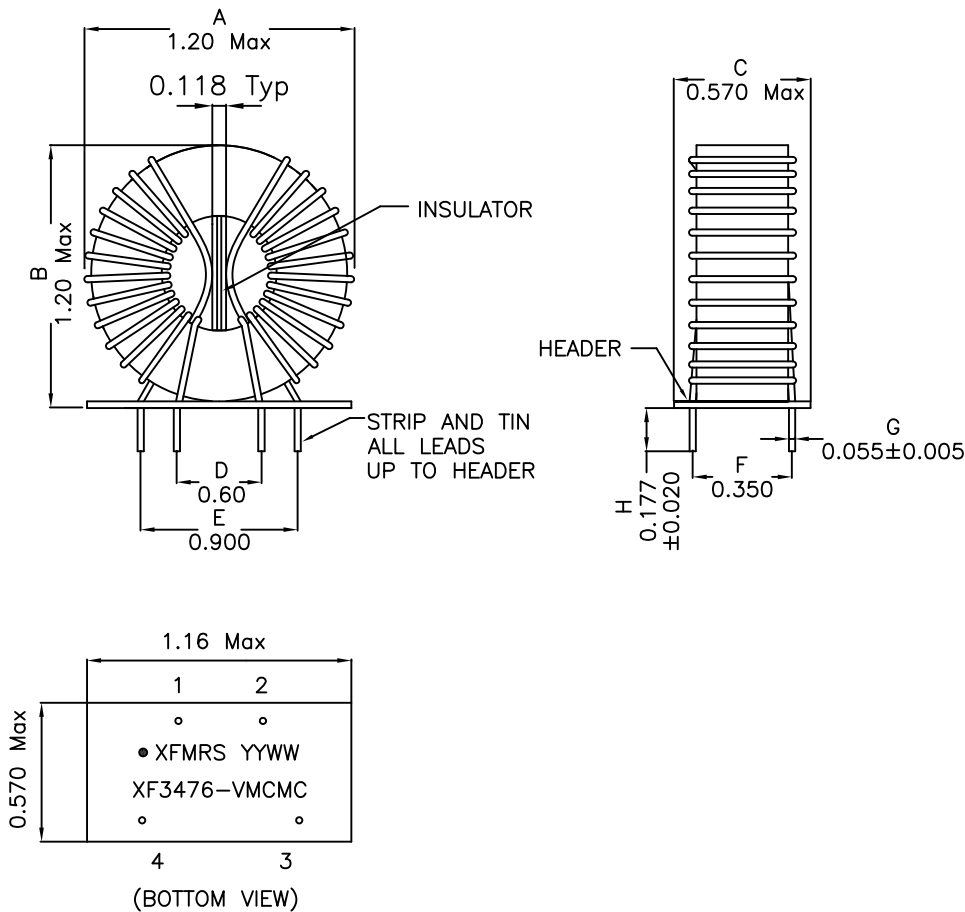

2. Schematic:

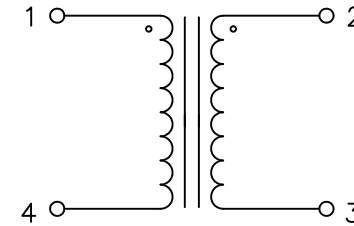

3. Electrical Specifications: @25°C

OCL: 260uH Min 10KHz 0.01V, Each Wdg

100-600uH 10KHz 0.01V, Each Wdg (-40°C to +85°C)

Q: Pins 1-4 8 Min @10KHz 0.01V

DCR: 4.0 mOhms Max, Each Wdg

Rated Current: 20Adc

Hipot: 1500Vac


SRF: Pins 1-4 0.8MHz Min

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature: -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/6

XFMRs Inc www.XFMRs.com		Title: Common Mode Choke	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF3476-VMCMC	REV. A	
	DWN.	Xiang	Dec-26-16
SHEET 1 OF 2	CHK.	YK Liao	Dec-26-16
	APP.	BW	Dec-26-16

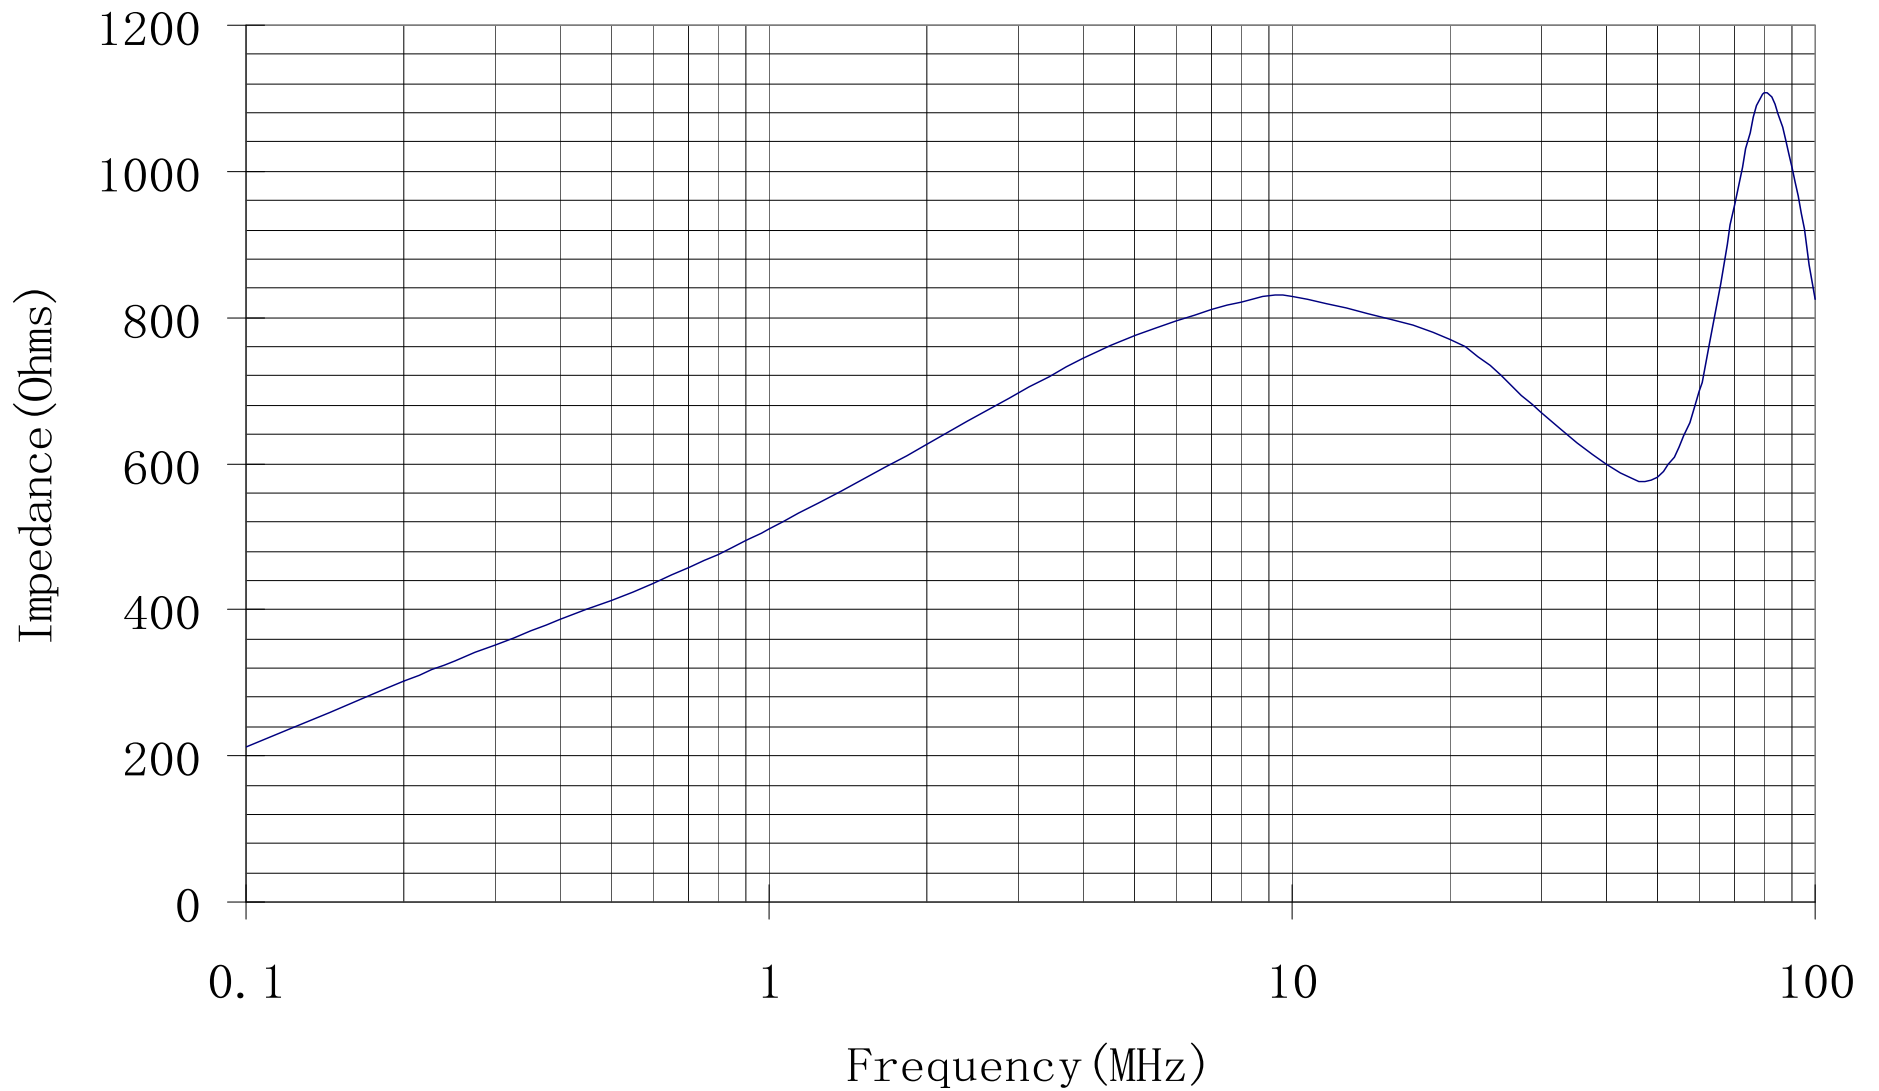

DOC. REV: A/6

XFMRs Inc www.XFMRs.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED	P/N: XF3476-VMCMC	REV. A
TOLERANCES: .xxx ±0.010	DWN.	Xiang	Dec-26-16
Dimensions in Inch	CHK.	YK Liao	Dec-26-16
SHEET 2 OF 2	APP.	BW	Dec-26-16

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.