



1. Mechanical Dimensions:

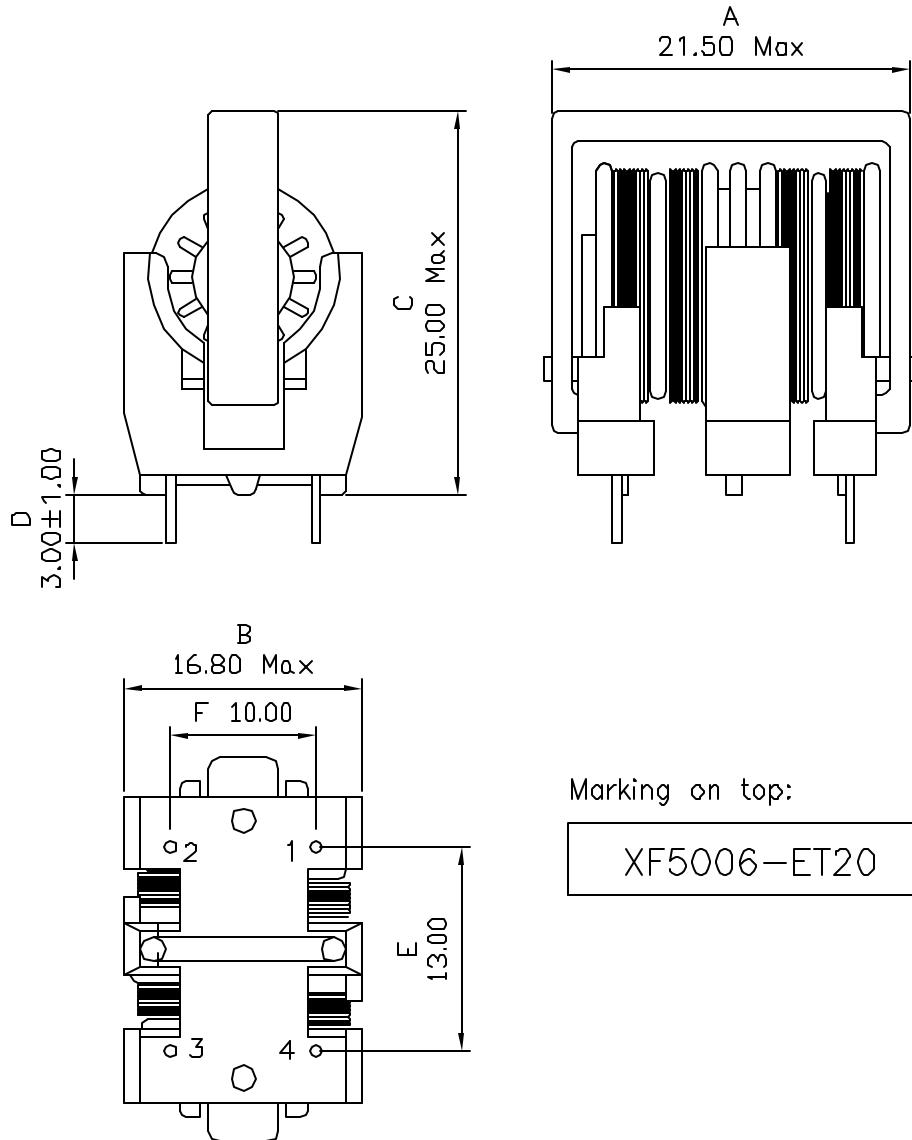

2. Schematic:

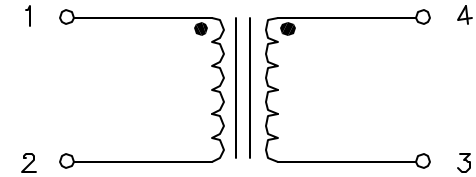

3. Electrical Specifications:

OCL: 500uH Min @1KHz 1V, Each Wdg

Q: tbd Min @1KHz 1V

DCR: 0.070 Ohms Max, Each Wdg

Rated Current: 2.0Aac Max

Isolation Voltage: 1500Vac

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com	Title: LINE FILTER		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	P/N: XF5006-ET20	REV. A	
	DWN.	罗振江	Jul-25-08
SHEET 1 OF 1	CHK.	廖玉坤	Jul-25-08
	APP.	BW	Jul-25-08