

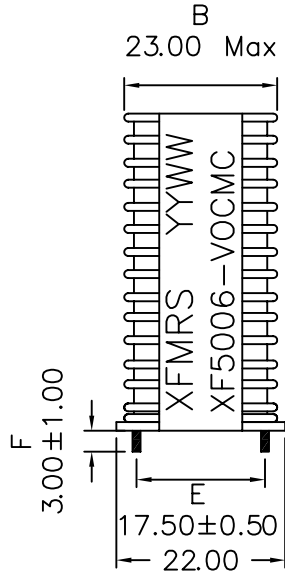


1. Mechanical Dimensions:

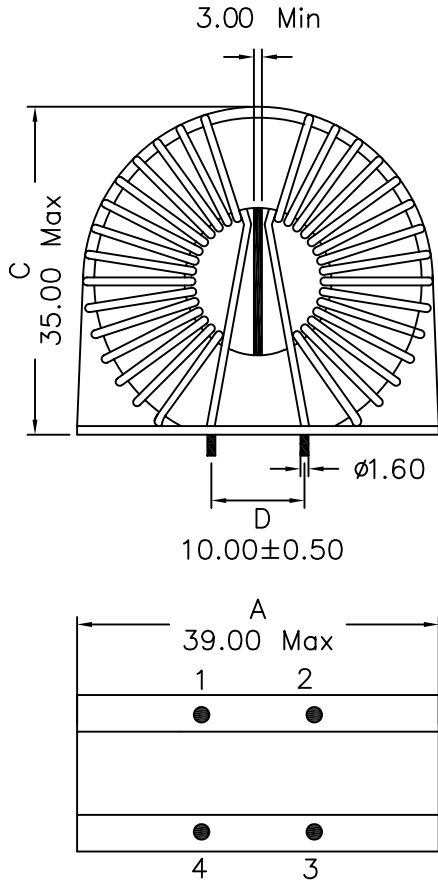

2. Schematic:

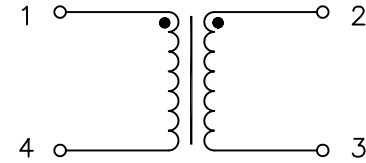

3. Electrical Specifications: @25C

Inductance: 500uH Min @10KHz 0.1V, Each Wdg
 Rated Current: 30Adc
 DC Resistance: 0.004 Ohms Max, Each Wdg
 HIPOT: 2500Vac, Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

XFMRS Inc www.XFMRS.com		Title: COMMON CODE CHOKE	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in mm	P/N: XF5006-VOCMC	REV. A	
	DWN.	李小锋	May-26-10
SHEET 1 OF 1	CHK.	康玉坤	May-26-10
	APP.	BW	May-26-10