



1. Mechanical Dimensions:

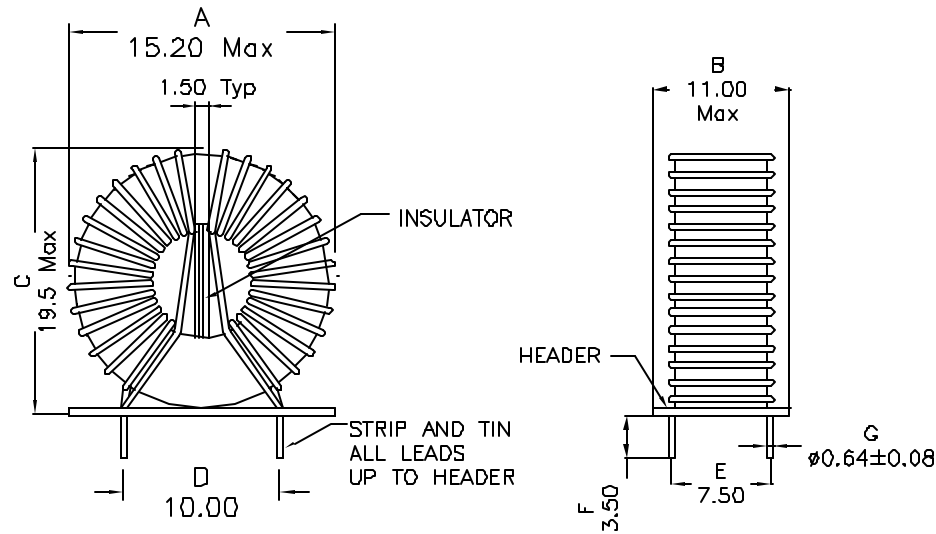


(BOTTOM VIEW)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

2. Schematic:

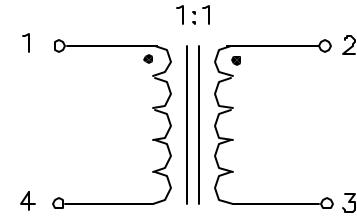

3. Electrical Specification:

URNS RATIO: 1:1

OCL: 0.768mH $\pm 25\%$ @10KHz 1.0V each

DCR: 0.040 OHMS Max each

Rated Current (For 55c Rise): 4.7 A

HIPOT: 1000Vrms (wdg. to wdg.)

DOC. REV A/2

XFMR5 Inc. www.XFMR5.com	Title: TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES:	P/N: XF7686-VMCMC	REV. A
.xx ± 0.25	DWN.	Juan Mao	Apr-15-08
Dimensions in MM	CHK.	YK Liao	Apr-15-08
SHEET 1 OF 1	APP.	BW	Apr-15-08

PROPRIETARY Document is the property of XFMR5 Group & is not allowed to be duplicated without authorization.