

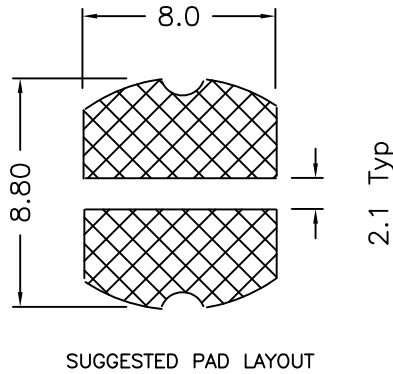




1. Mechanical Dimensions:



2. Schematic:



3. Electrical Specifications:

- OCL: 150uH±20% @100KHz 100mV
- Q: 12 Min @100KHz 100mV
- DCR: 0.64 Ohms Max.
- IDC: 0.95A Max.
- SRF: 2MHz Min

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV A/3

XFMR5 Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in MM SHT 1 OF 1	Title: XFSDR75 SERIES INDUCTORS		
	P/N: XFSDR75-151M		REV. A
	DWN.	Xiang	Mar-16-16
	CHK.	YK Liao	Jan-16-16
	APP.	BW	Jan-16-16