



### 1. Mechanical Dimensions:

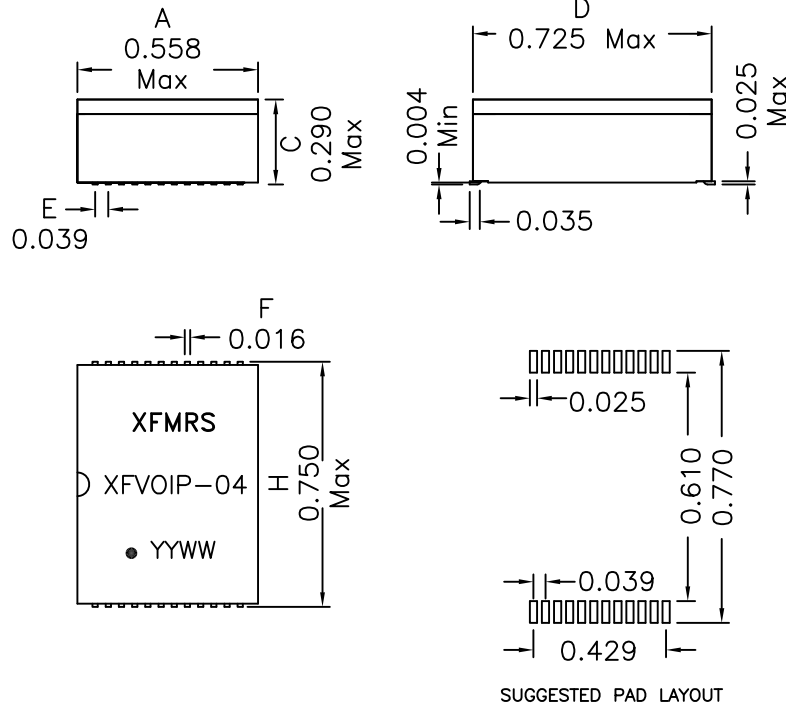

### 2. Schematic:

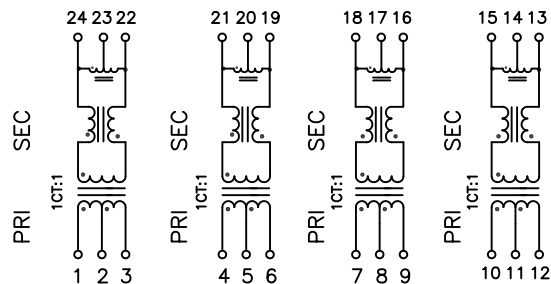

### 3. Electrical Specifications: @25°C

- ISOLATION: 1500 Vrms
- INSERTION LOSS: -1.1dB Max @1MHz-100MHz
- PRI OCL: 350 uH Min @100KHz 100mV 8mADC
- PRI Q: 12 Min @100KHz 100mV
- RETURN LOSS: -16dB Min @1-30MHz
  - 14dB Min @40MHz
  - 13dB Min @50MHz
  - 12dB Min @60-80MHz
- Differential to Common Mode Rejection:
  - 43dB Min @30MHz
  - 37dB Min @60MHz
  - 33dB Min @100MHz
- Crosstalk: -43dB Min @30MHz
  - 37dB Min @60MHz
  - 33dB Min @100MHz

#### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC. REV: C/2

<b>XFMR5 Inc</b> www.XFMR5.com	Title: <b>VOICE OVER IP MAGNETICS</b>		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH		P/N: XFVOIP-04 REV. C
SHEET 1 OF 1	DWN.	Yuan	Oct-22-12
	CHK.	YK Liao	Oct-22-12
APP.	BSJ	Oct-22-12	

**PROPRIETARY**

Document is the property of XFMR5 Group & is not allowed to be duplicated without authorization.